

C.V. version with converter integrated in the cable

C.C. - 350 mA

Steel Alu	<b>80582</b>	2700K	490 lm	<b>M</b>	Spot	<b>15</b>
		3000K	490 lm	<b>W</b>	Medium Flood	<b>30</b>
		4000K	529 lm	<b>N</b>	Flood	<b>60</b>
					Elliptic	<b>25</b>

HC	Steel Alu	<b>80583</b>	2700K	490 lm	<b>M</b>	Spot	<b>15</b>
			3000K	490 lm	<b>W</b>	Medium Flood	<b>30</b>
			4000K	529 lm	<b>N</b>	Flood	<b>60</b>

DL	Steel Alu	<b>80584</b>	2700K	490 lm	<b>M</b>	Spot	<b>15</b>
			3000K	490 lm	<b>W</b>	Medium Flood	<b>30</b>
			4000K	529 lm	<b>N</b>	Flood	<b>60</b>

Electronics



**89421**  
ON/OFF  
1 art.



**99183**  
ON/OFF  
2 - 3 art.

C.V. - 24 V

Steel Alu	<b>80585</b>	2700K	490 lm	<b>M</b>	Spot	<b>15</b>
		3000K	490 lm	<b>W</b>	Medium Flood	<b>30</b>
		4000K	529 lm	<b>N</b>	Flood	<b>60</b>
					Elliptic	<b>25</b>

HC	Steel Alu	<b>80586</b>	2700K	490 lm	<b>M</b>	Spot	<b>15</b>
			3000K	490 lm	<b>W</b>	Medium Flood	<b>30</b>
			4000K	529 lm	<b>N</b>	Flood	<b>60</b>

DL	Steel Alu	<b>80587</b>	2700K	490 lm	<b>M</b>	Spot	<b>15</b>
			3000K	490 lm	<b>W</b>	Medium Flood	<b>30</b>
			4000K	529 lm	<b>N</b>	Flood	<b>60</b>

Electronics



**89488**  
ON/OFF  
1 - 3 art.



**89179**  
ON/OFF  
1 - 6 art.



**89359**  
ON/OFF  
1 - 12 art.




**99332**  
0/1-10V  
1 - 37 art.



**99722**  
DALI  
1 - 30 art.

Recessed casings

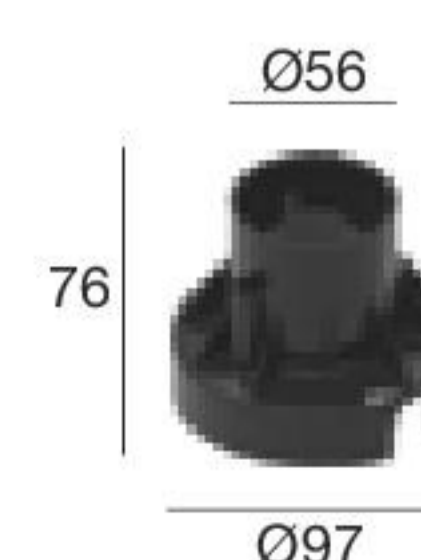

**99650**  
Outer casing for ground-mounting installation