


Orma | Up-Light | arrayLED 8 W

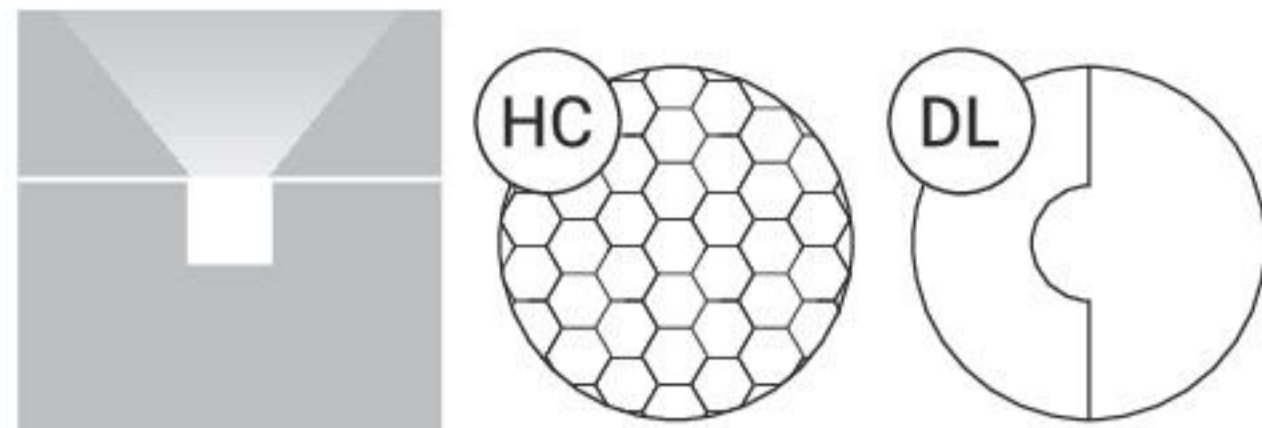

C.V. version with converter integrated in the lamp body

C.C. - 220 mA

Steel Alu	80588	2700K	1088 lm	M	Spot	15
		3000K	1088 lm	W	Medium Flood	30
		4000K	1173 lm	N	Flood	60

HC

Steel Alu	80589	2700K	1088 lm	M	Spot	15
		3000K	1088 lm	W	Medium Flood	30
		4000K	1173 lm	N	Flood	60

DL

Steel Alu	80590	2700K	1088 lm	M	Spot	15
		3000K	1088 lm	W	M. Flood	30
		4000K	1173 lm	N	Flood	60

Electronics



99342
ON/OFF
1 art.

C.V. - 24 V

Steel Alu	81172	2700K	1209 lm	M	Spot	15
		3000K	1209 lm	W	Medium Flood	30
		4000K	1303 lm	N	Flood	60


HC

Steel Alu	81173	2700K	1209 lm	M	Spot	15
		3000K	1209 lm	W	Medium Flood	30
		4000K	1303 lm	N	Flood	60


DL

Steel Alu	81174	2700K	1209 lm	M	Spot	15
		3000K	1209 lm	W	Medium Flood	30
		4000K	1303 lm	N	Flood	60


Electronics

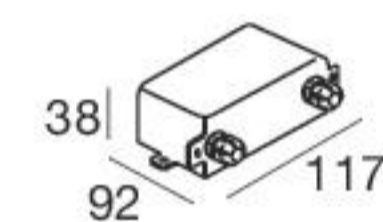


89179
ON/OFF
1 - 3 art.

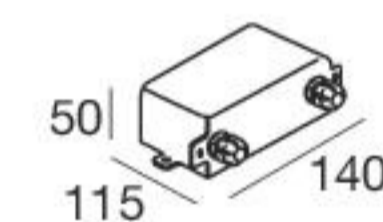


89359
ON/OFF
1 - 6 art.

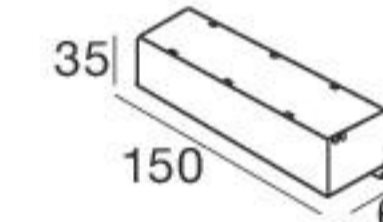

99331
ON/OFF
1 - 18 art.

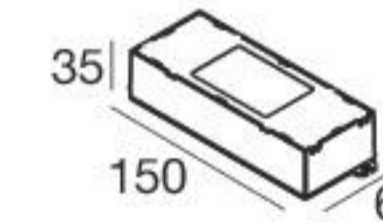

99332
0/1-10V
1 - 18 art.

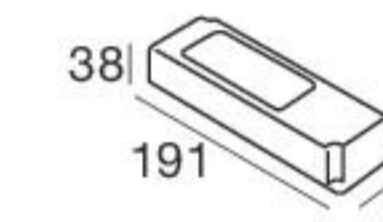


99722
DALI
1 - 15 art.




RGBW - 8W - 630Ma

Steel Alu	81321	RGBW natural white	Q	Narrow Spot	06
		RGBW warm white	V	Medium Flood	15
				Flood	45
				General	00

Electronics

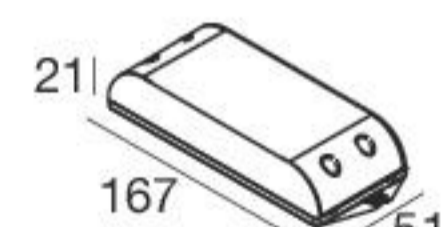


RF driver CC
970

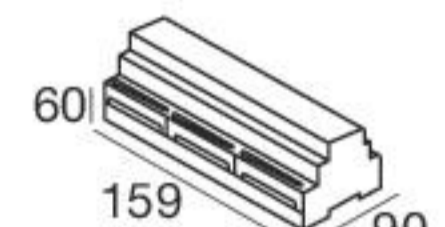


DMX driver CC
977



DMX controllers
995




driver CV 24V/48V
981-982



switching CV 24V/48V
986-989

Recessed casings

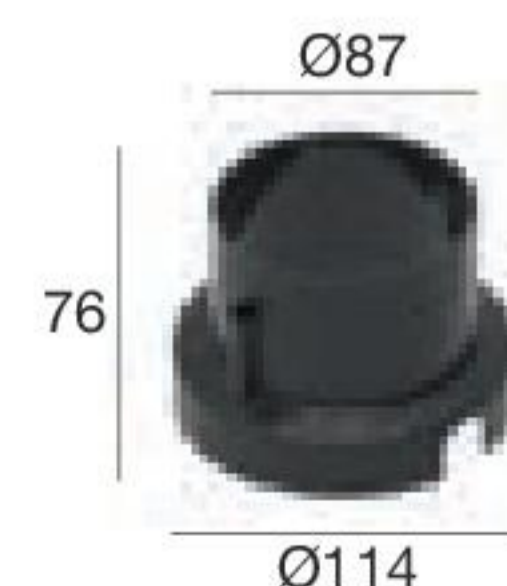

99651
Outer casing for ground-mounting installation