

C.V. version with converter integrated in the cable

RTG 81181W15
81181W30

C.C. - 350 mA

	Steel Alu	81181	2700K	490 lm	M	Spot	15
			3000K	490 lm	W	Medium Flood	30
			4000K	529 lm	N	Flood	60
						Elliptic	25
HC	Steel Alu	81182	2700K	490 lm	M	Spot	15
			3000K	490 lm	W	Medium Flood	30
			4000K	529 lm	N	Flood	60
DL	Steel Alu	81183	2700K	490 lm	M	Spot	15
			3000K	490 lm	W	M. Flood	30
			4000K	529 lm	N	Flood	60

Electronics



89421
ON/OFF
1 art.

99183
ON/OFF
2 - 3 art.

C.V. - 24 V

	Steel Alu	81184	2700K	490 lm	M	Spot	15
			3000K	490 lm	W	Medium Flood	30
			4000K	529 lm	N	Flood	60
						Elliptic	25
HC	Steel Alu	81185	2700K	490 lm	M	Spot	15
			3000K	490 lm	W	Medium Flood	30
			4000K	529 lm	N	Flood	60
DL	Steel Alu	81186	2700K	490 lm	M	Spot	15
			3000K	490 lm	W	Medium Flood	30
			4000K	529 lm	N	Flood	60

Electronics



89488
ON/OFF
1 - 3 art.


89179
ON/OFF
1 - 6 art.

89359
ON/OFF
1 - 12 art.


99332
0/1-10V
1 - 37 art.

99722
DALI
1 - 30 art.

Recessed casings

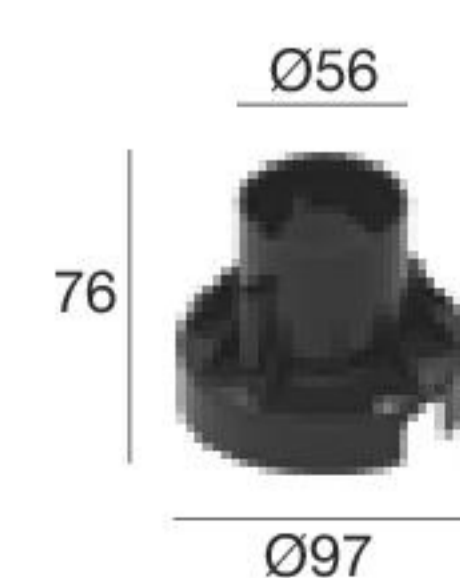

99650
Outer casing for ground-mounting installation

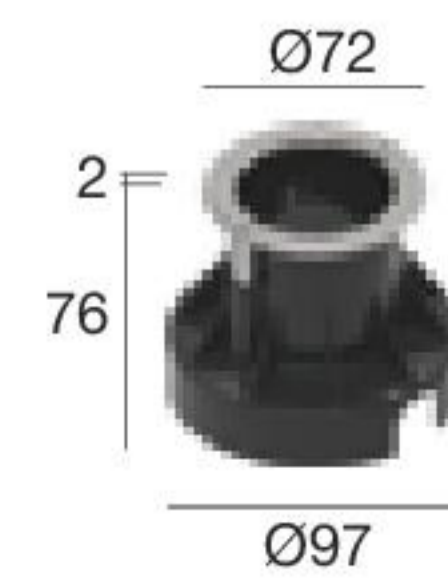

99560
Outer casing with drilled flange, anti-vandalism screws, gasket and mounting tool