
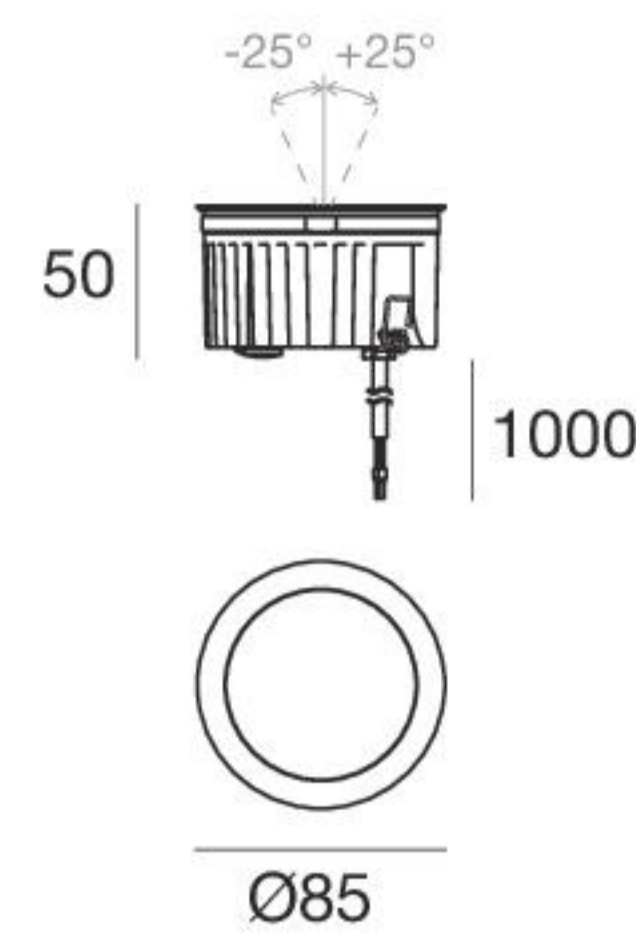


Orma_FJ | Up-Light | arrayLED 8 W

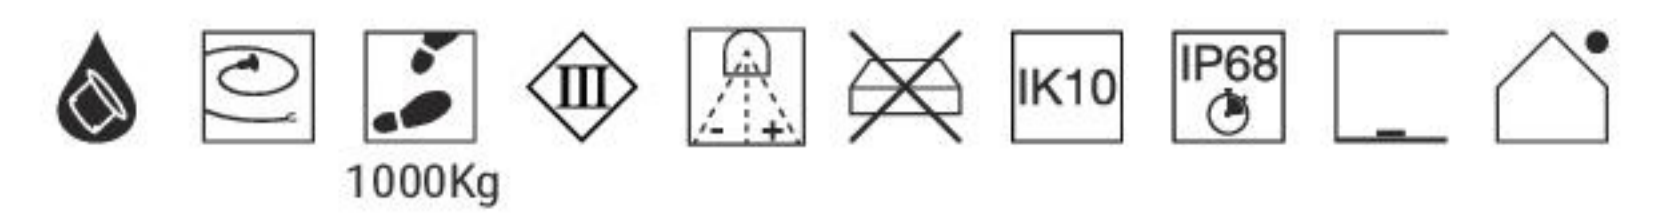

C.V. version with converter integrated in the lamp body

C.C. - 220 mA

| | | | | | |
|------------------------|-------|---------|----------|--------------|-----------|
| Steel Alu 81207 | 2700K | 1088 lm | M | Spot | 15 |
| | 3000K | 1088 lm | W | Medium Flood | 30 |
| | 4000K | 1173 lm | N | Flood | 60 |

Electronics




99342
ON/OFF
1 art.


C.V. - 24 V

| | | | | | |
|------------------------|-------|---------|----------|--------------|-----------|
| Steel Alu 81208 | 2700K | 1209 lm | M | Spot | 15 |
| | 3000K | 1209 lm | W | Medium Flood | 30 |
| | 4000K | 1303 lm | N | Flood | 60 |


Electronics

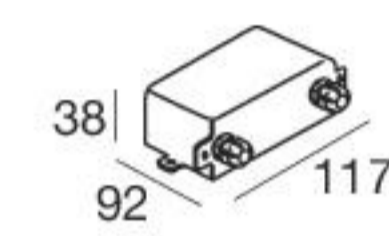


89179
ON/OFF
1 - 3 art.

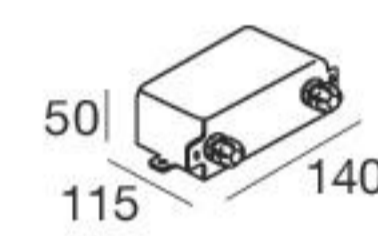


89359
ON/OFF
1 - 6 art.

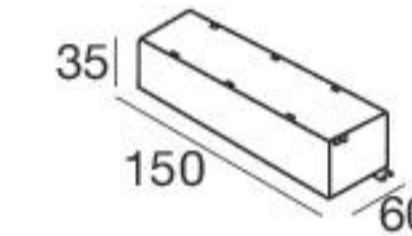

99331
ON/OFF
1 - 18 art.

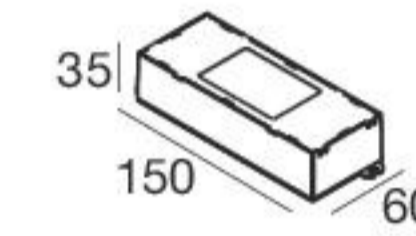


99332
0/1-10V
1 - 18 art.

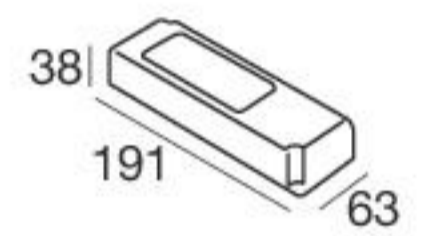

99722
DALI
1 - 15 art.

Orma_FL | Path-Marker | powerLED 2 W

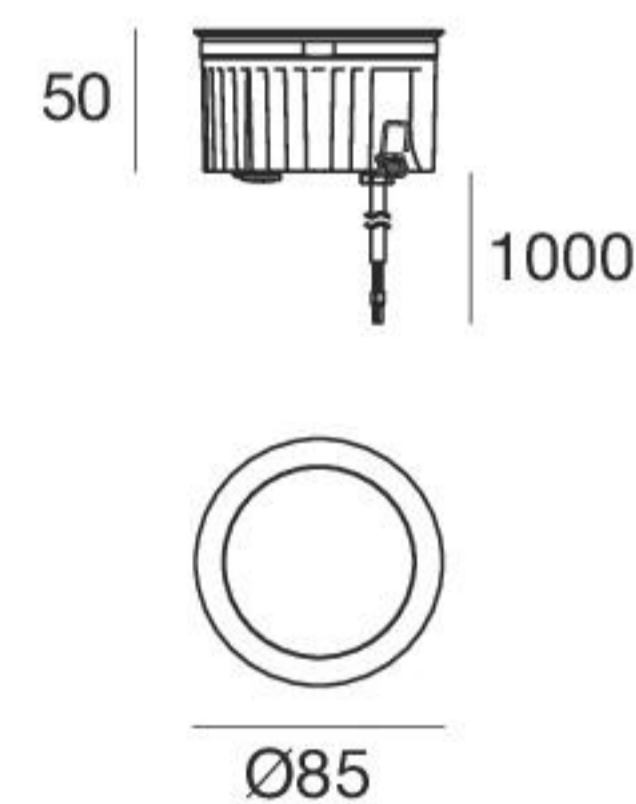


C.V. version with converter integrated in the lamp body


C.C. - 630 mA

| | | | | | |
|------------------------|-------|--------|----------|---------|-----------|
| Steel Alu 81219 | 2700K | 219 lm | M | General | 00 |
| | 3000K | 233 lm | W | | |
| | 4000K | 249 lm | N | | |


Electronics

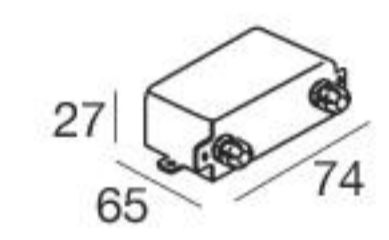

89420
ON/OFF
1 - 2 art.

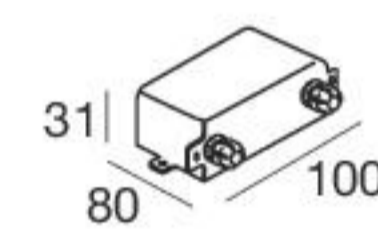

99179
ON/OFF
3 - 6 art.

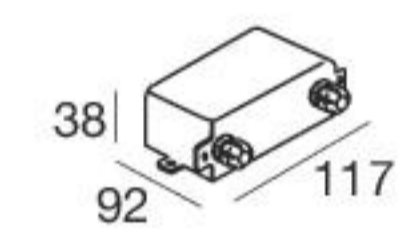

99186
ON/OFF
6 - 12 art.

C.V. - 24 V

| | | | | | |
|------------------------|-------|--------|----------|---------|-----------|
| Steel Alu 81220 | 2700K | 219 lm | M | General | 00 |
| | 3000K | 233 lm | W | | |
| | 4000K | 249 lm | N | | |

Electronics



89488
ON/OFF
1 - 14 art.



89179
ON/OFF
1 - 24 art.



89359
ON/OFF
1 - 48 art.




99332
0/1-10V
1 - 150 art.



99722
DALI
1 - 120 art.

Recessed casings

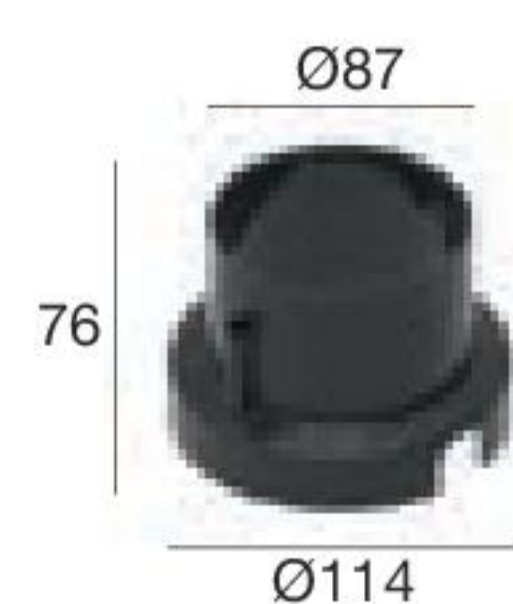

99651
Outer casing for ground-mounting installation



99563
Outer casing with drilled flange, anti-vandalism screws, gasket and mounting tool