

C.V. version with converter integrated in the lamp body

C.C. - 350 mA

Steel Alu	81193	2700K	1724 lm	M	Spot	15
		3000K	1724 lm	W	Medium Flood	30
		4000K	1854 lm	N	Flood	60
HC	Steel Alu 81194	2700K	1724 lm	M	Spot	15
		3000K	1724 lm	W	Medium Flood	30
		4000K	1854 lm	N	Flood	60
DL	Steel Alu 81195	2700K	1724 lm	M	Spot	15
		3000K	1724 lm	W	Medium Flood	30
		4000K	1854 lm	N	Flood	60

Electronics




99183
ON/OFF
1 art.


C.V. - 24 V

Steel Alu	81196	2700K	1724 lm	M	Spot	15
		3000K	1724 lm	W	Medium Flood	30
		4000K	1854 lm	N	Flood	60
HC	Steel Alu 81197	2700K	1724 lm	M	Spot	15
		3000K	1724 lm	W	Medium Flood	30
		4000K	1854 lm	N	Flood	60
DL	Steel Alu 81198	2700K	1724 lm	M	Spot	15
		3000K	1724 lm	W	Medium Flood	30
		4000K	1854 lm	N	Flood	60


Electronics

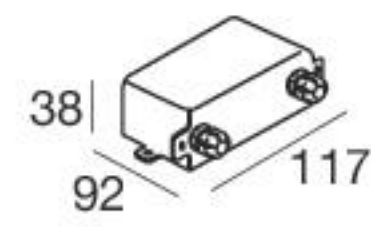


89179
ON/OFF
1 art.

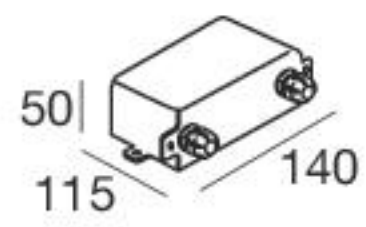


89359
ON/OFF
1 - 3 art.

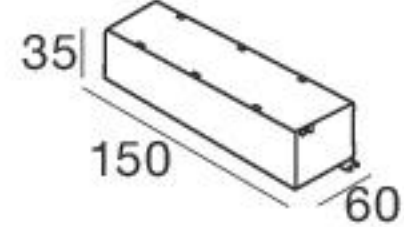

99331
ON/OFF
1 - 11 art.

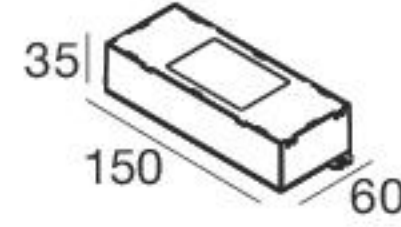

99332
0/1-10V
1 - 11 art.

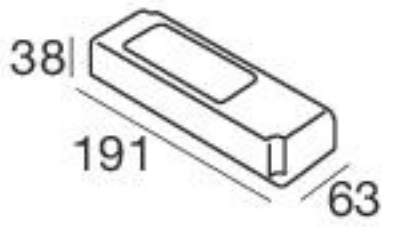


99722
DALI
1 - 9 art.

Recessed casings



99652
Outer casing for ground-mounting installation

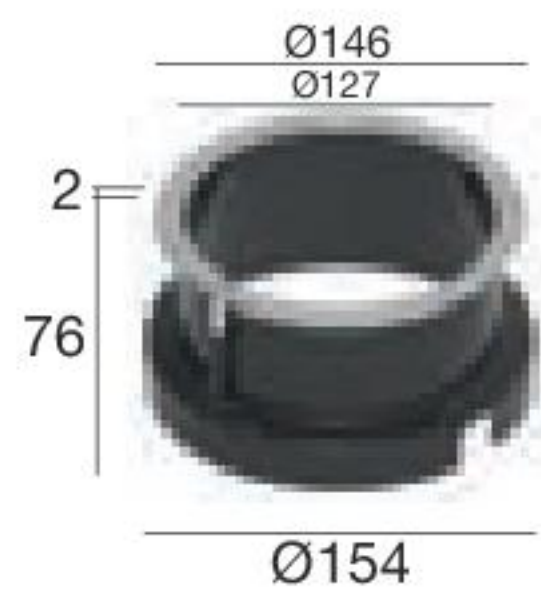

99564
Outer casing with drilled flange, anti-vandalism screws, gasket and mounting tool