


opti-pole lighting concept

Simple design

Opti-Pole's extremely compact form is designed for minimum visual impact. The head is barely 15 mm thick. Its range of finishes, in classic grey, anthracite, and corten, makes it even more elegant.



OptiLight™




IK07

IP65


Visual comfort

Opti-Pole uses OptiLight technology to achieve unique visual comfort by reducing glare to zero. The source is positioned laterally inside the optics, and the laser microincisions in the PMMA diffuser channel the beam evenly. Opti-Pole covers the ground to the front and sides of the bollard, and also part of the back.

65395W07

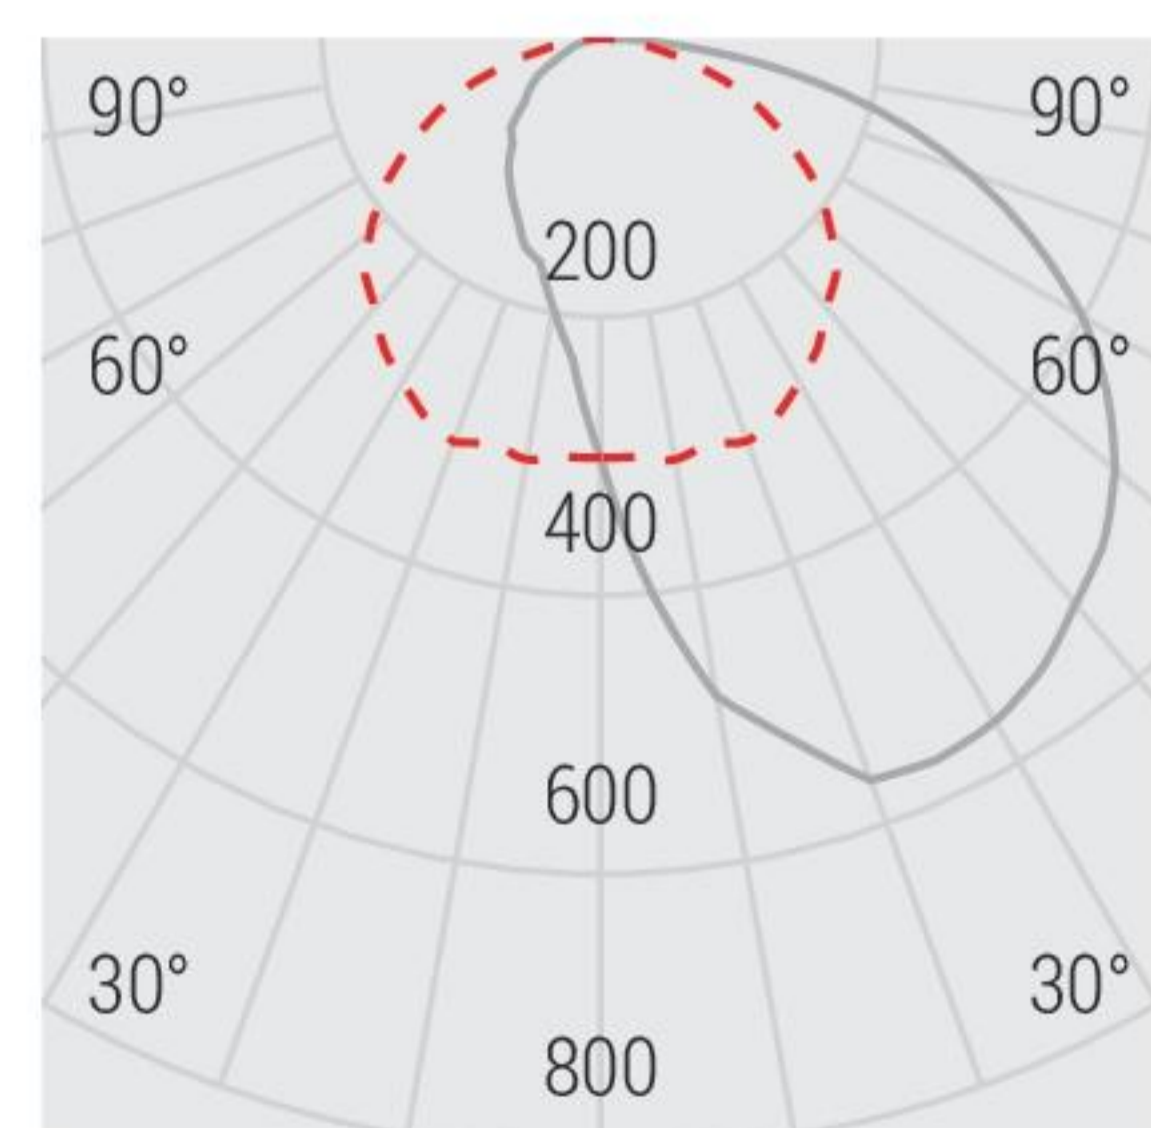


Photometric curve

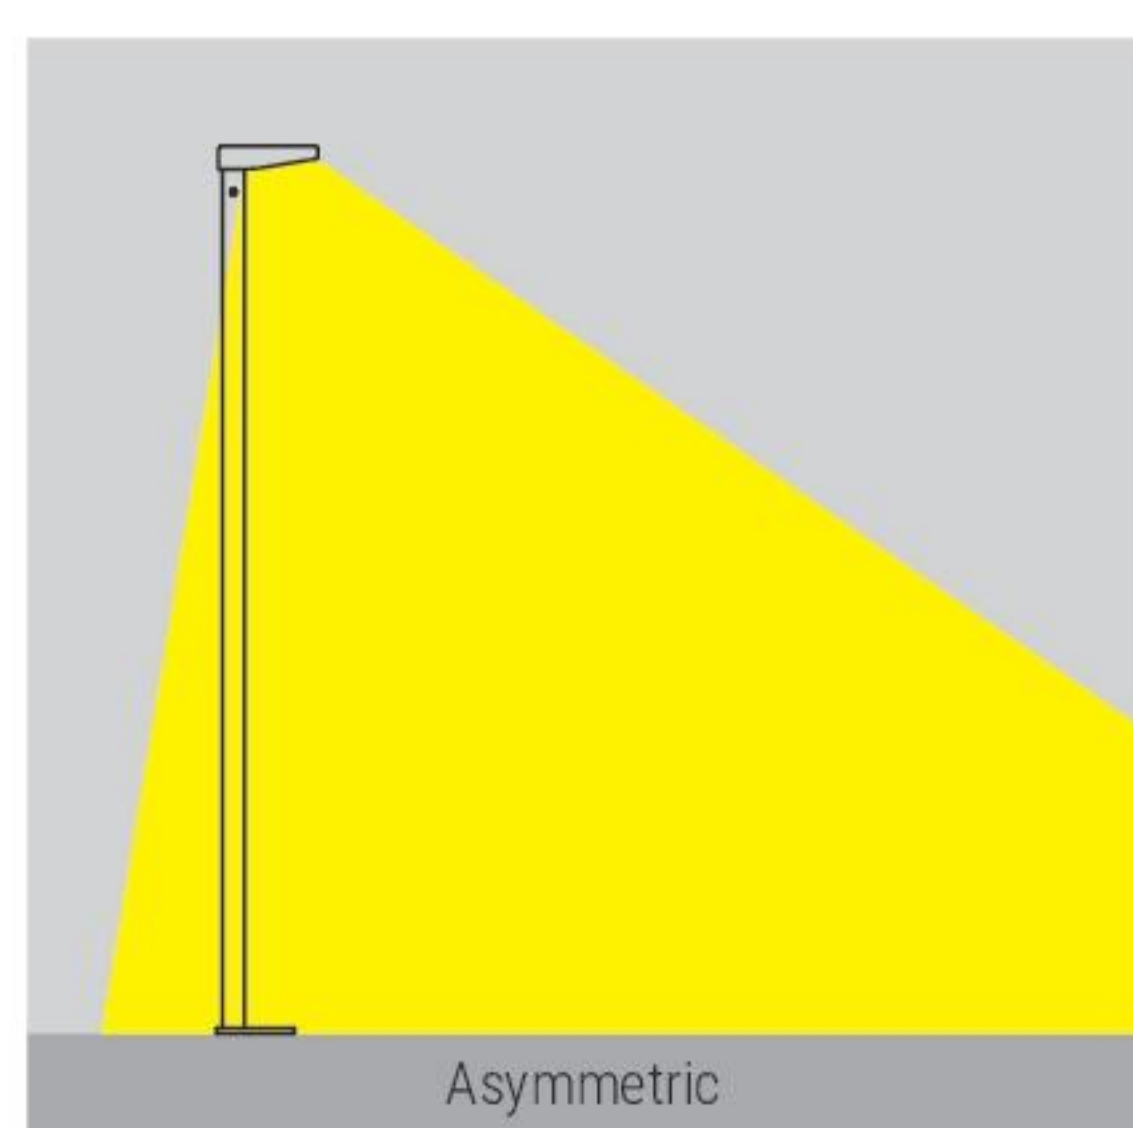

Asymmetric

Light beam

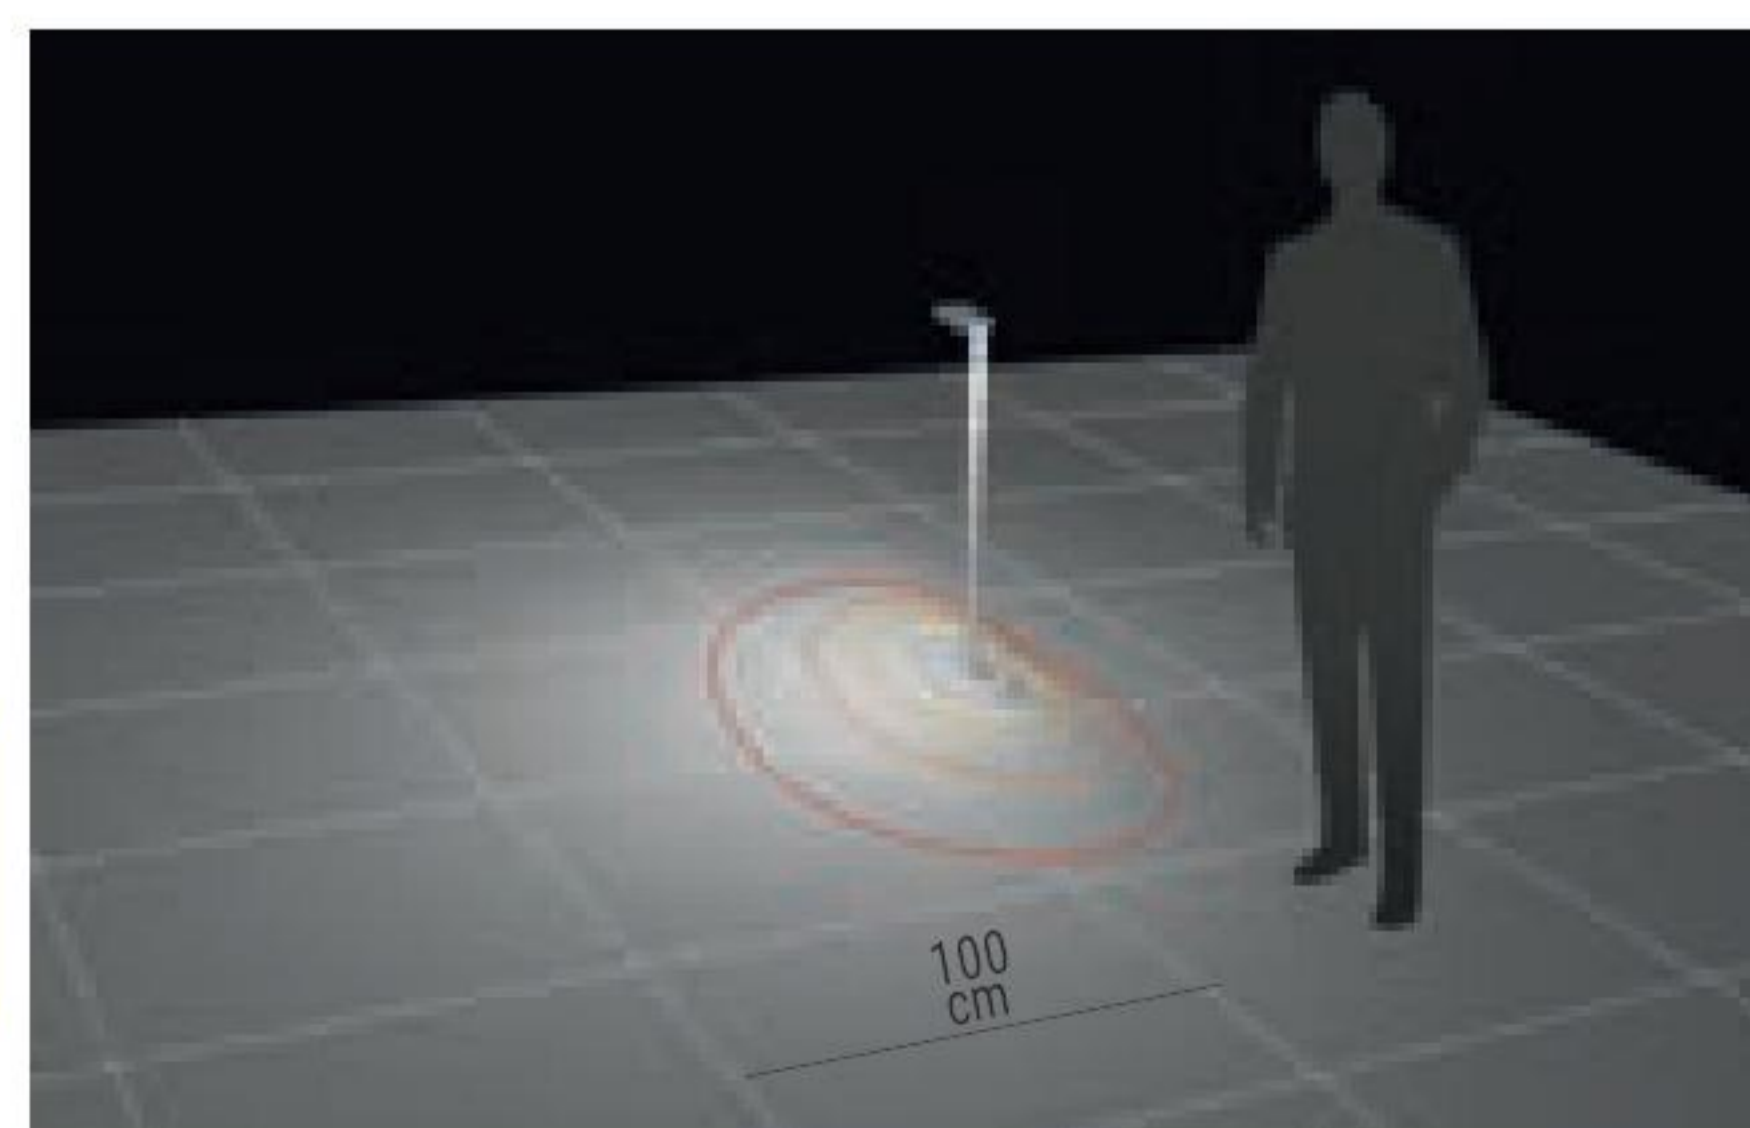


10 LUX

25 LUX

50 LUX

75 LUX

125 LUX

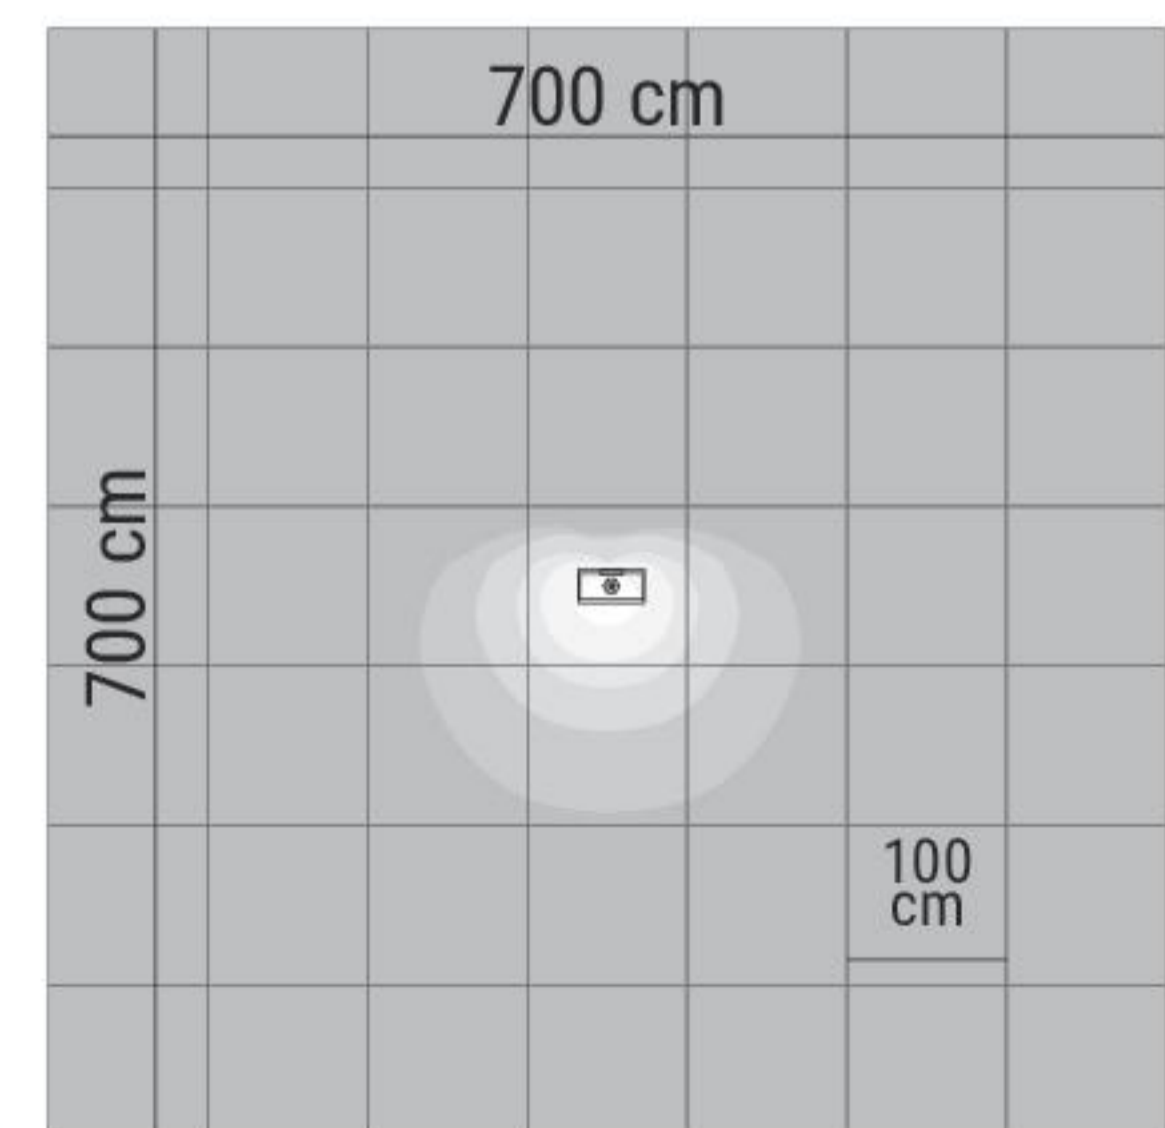

Floor plan