









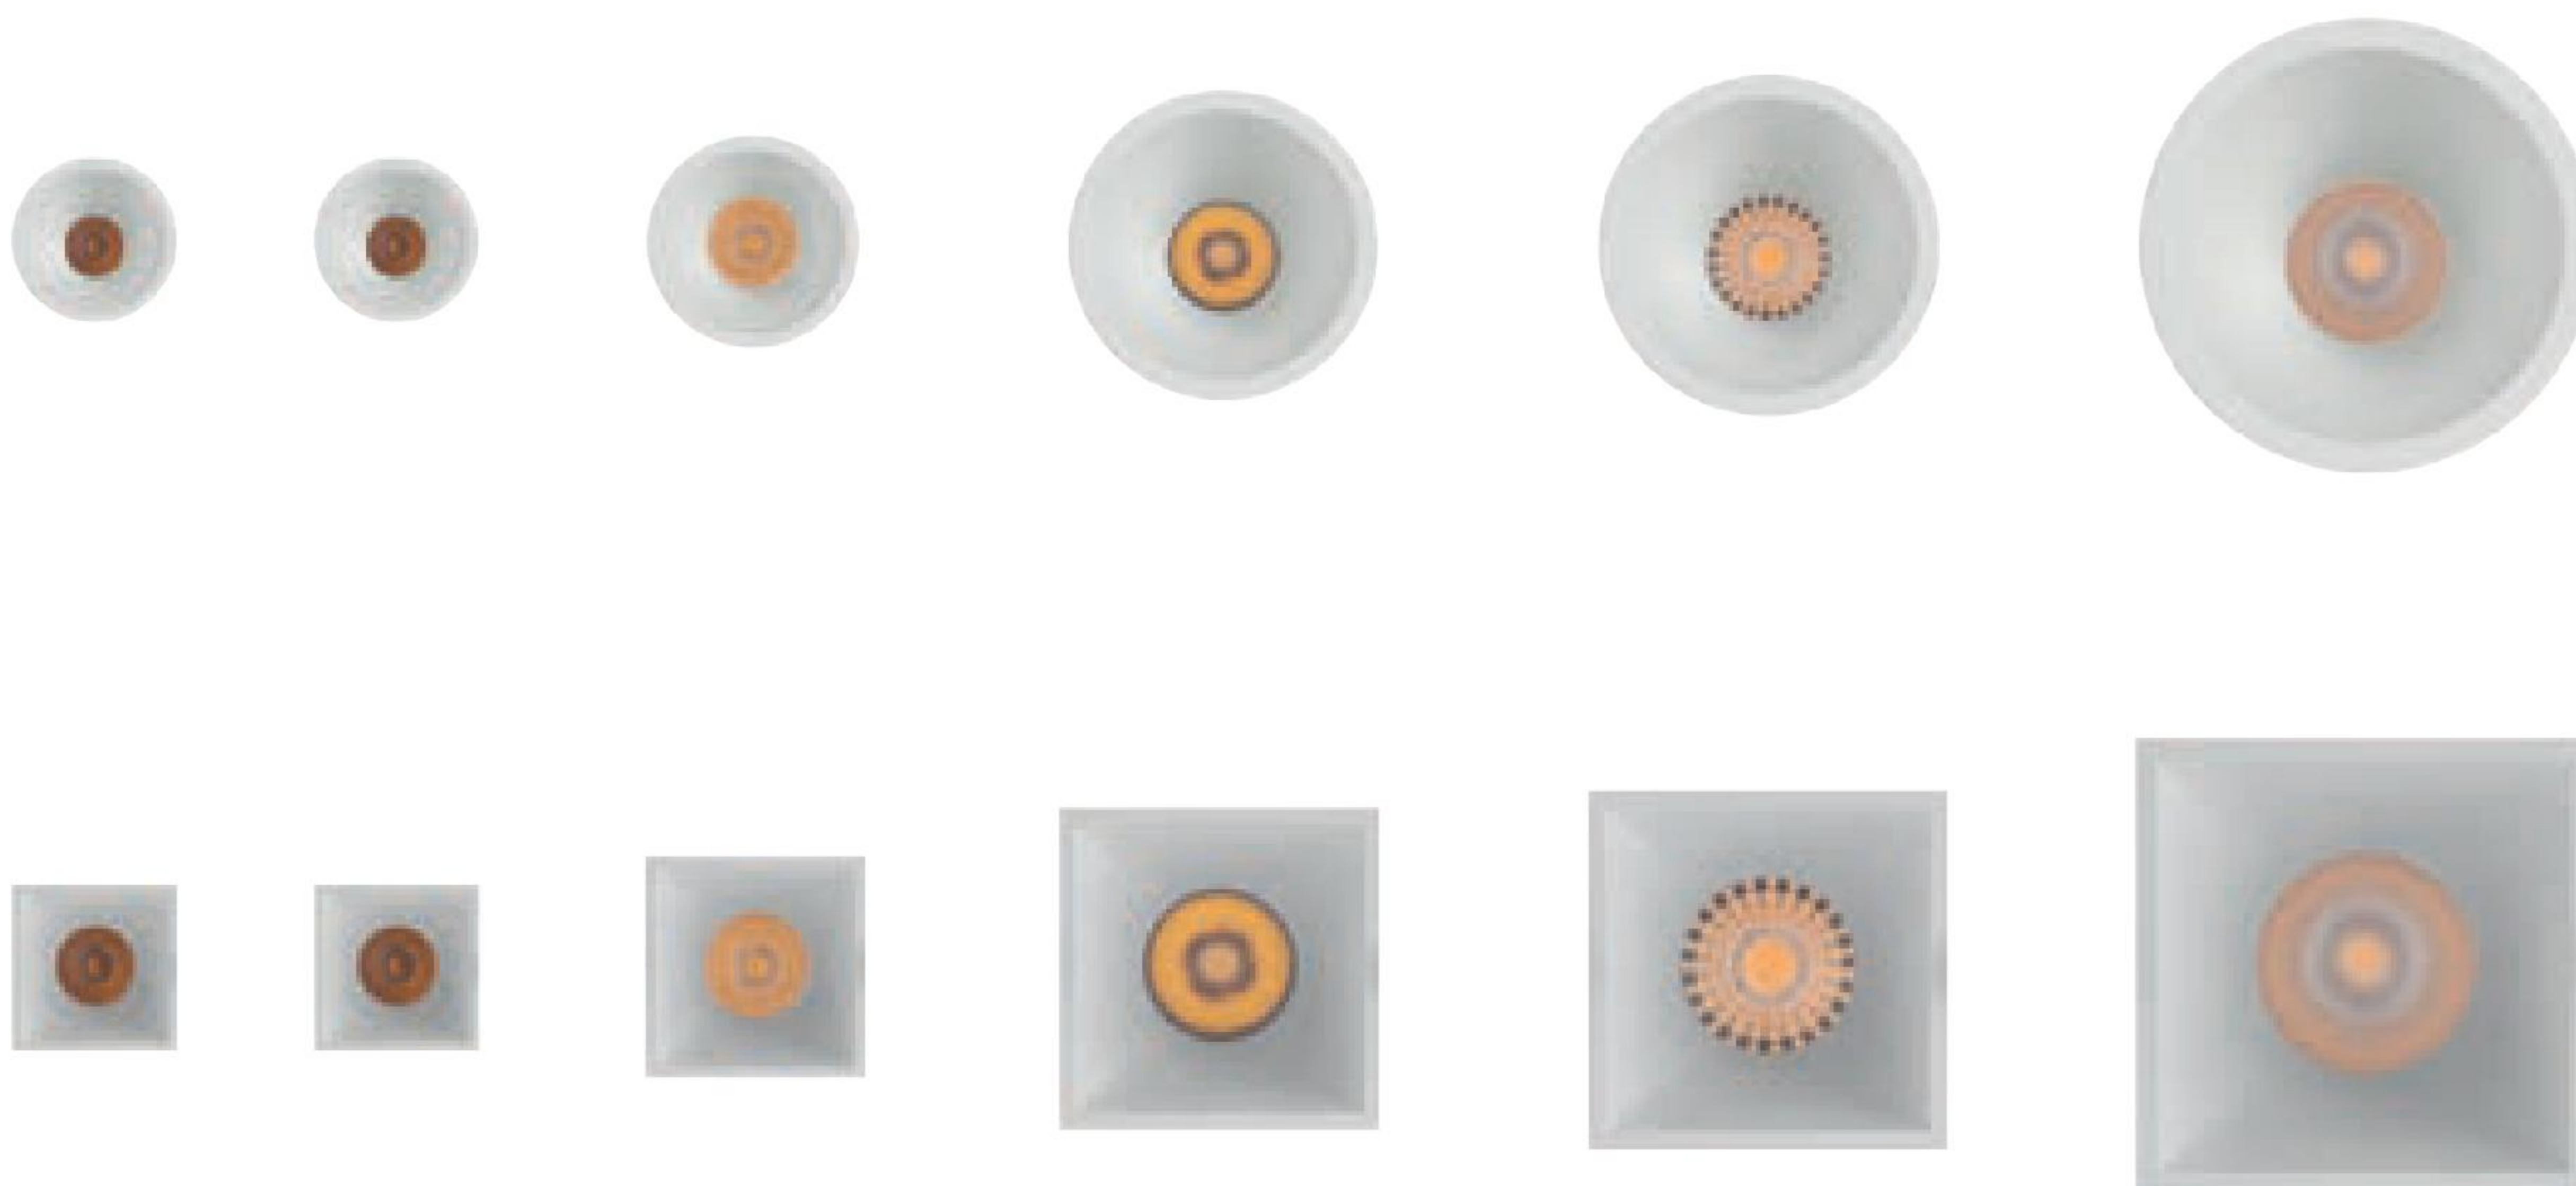












# warp range



	2 W	4 W	6 W	8 W	10 W	15 W	25 W	45 W
<b>_R</b> 	Ø 35 mm	Ø 35 mm	Ø 42 mm	-	Ø 71 mm	Ø 100 mm	Ø 135 mm	Ø 135 mm
<b>_RY</b> 	Ø 50 mm	Ø 50 mm	-	-	Ø 71 mm	Ø 100 mm	Ø 134 mm	-
<b>_RJ</b> 	-	-	-	Ø 80 mm	-	Ø 120 mm	-	-
<b>_Q</b> 	□ 35 mm	□ 35 mm	□ 42 mm	-	□ 71 mm	□ 100 mm	□ 135 mm	-
<b>_QY</b> 	□ 50 mm	□ 50 mm	-	-	□ 71 mm	□ 100 mm	□ 134 mm	-
<b>Accessories</b>				-		-		
<b>Finish</b>								
<b>Balance CRI 92</b>	2700K 3000K	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K
<b>Efficiency CRI 80</b>	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K
<b>WarmTune</b>	-	-	-	-	-	1800-3000K (_R / _Q)	1800-3000K (_R / _Q)	-
<b>Optics</b>	Spot Medium Flood Flood	Spot Medium Flood Flood	Spot Medium Flood Flood	Spot Medium Flood Flood	Spot Medium Flood Flood	Spot Medium Flood Flood	Spot Medium Flood Flood	Spot Medium Flood Flood
<b>Driver</b>	On/Off 1-10 V DALI	On/Off 1-10 V DALI	On/Off 1-10 V DALI	On/Off 1-10 V DALI	On/Off 1-10 V DALI	On/Off 1-10 V DALI	On/Off 1-10 V DALI	On/Off 1-10 V DALI
	29 mm (_R / _Q) 46 mm (_RY /_QY)	29 mm (_R / _Q) 46 mm (_RY /_QY)	35 mm (_R) 35 mm (_Q)	68 mm (_RJ)	64 mm (_R / _RY) 64 mm (_Q / _QY)	92 mm (_R / _RY _QY) 105 mm (_RJ) 91 mm (_Q)	127 mm (_R) 126 mm (_Q) 128 mm (_RY /_QY)	127 mm