


Ice-Cut66_F | Linear profiles | 24V | topLED 12 W/m

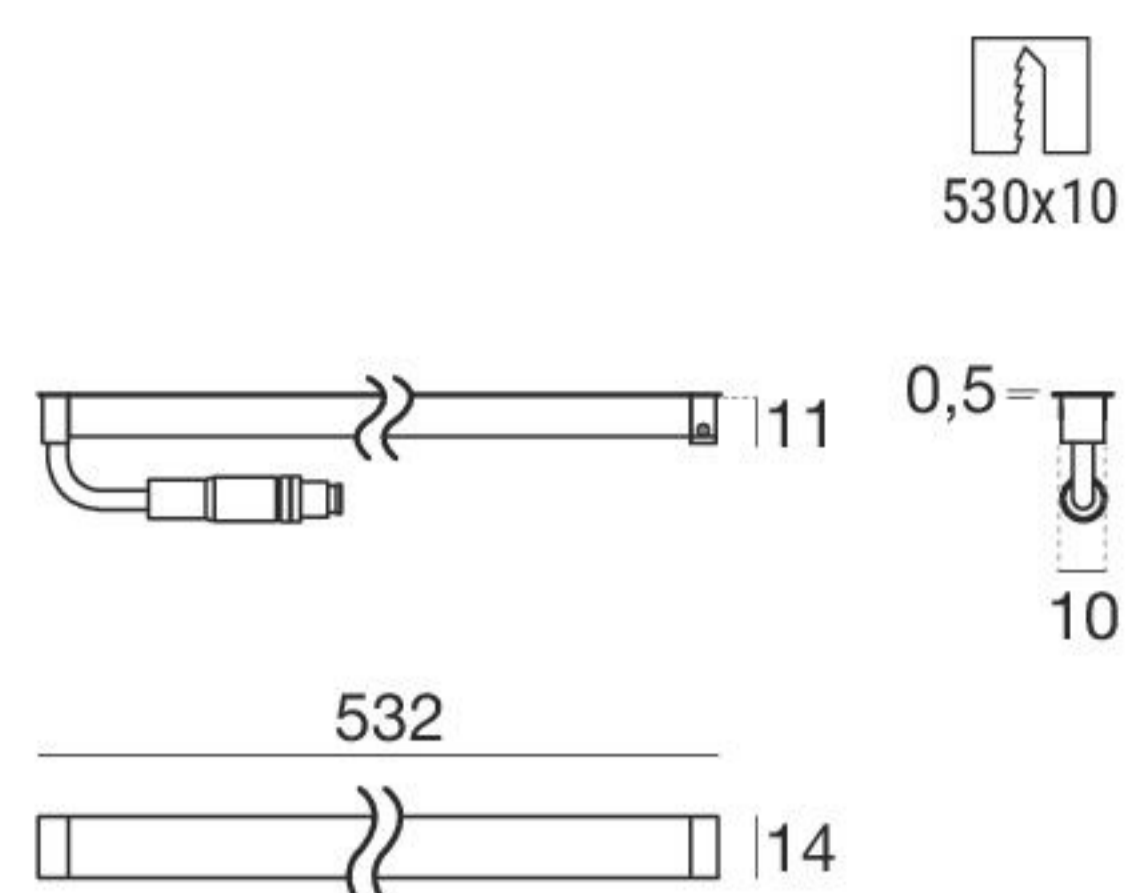


6 W - CRI 80

Opaline 81255	2700K	420 lm	M	General	00
	3000K	438 lm	W		
	4000K	478 lm	N		

Electronics

89179 ON/OFF 1 - 4 art.	89359 ON/OFF 1 - 8 art.	99331 ON/OFF 1 - 25 art.	99332 0/1-10V 1 - 25 art.	99722 DALI 1 - 20 art.

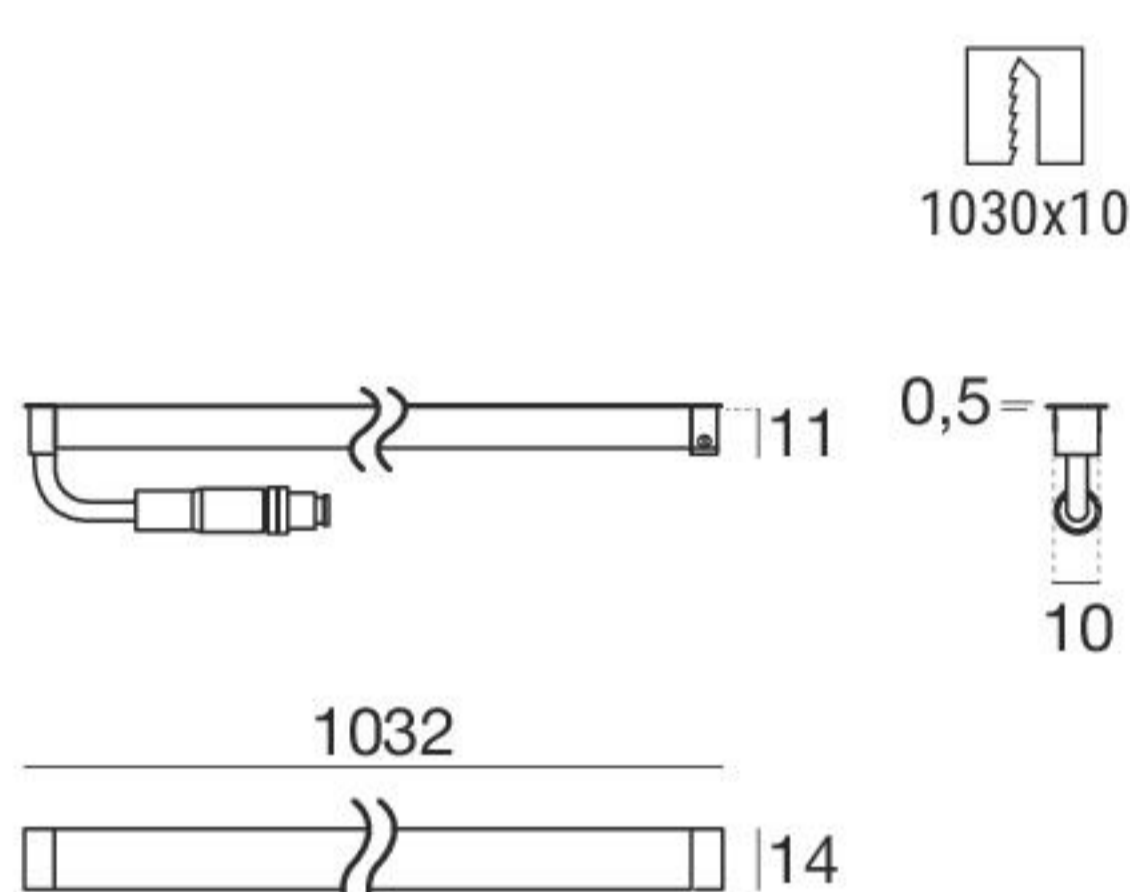


12 W - CRI 80

Opaline 81256	2700K	840 lm	M	General	00
	3000K	875 lm	W		
	4000K	956 lm	N		

Electronics

89179 ON/OFF 1 - 2 art.	89359 ON/OFF 1 - 4 art.	99331 ON/OFF 1 - 12 art.	99332 0/1-10V 1 - 12 art.	99722 DALI 1 - 10 art.

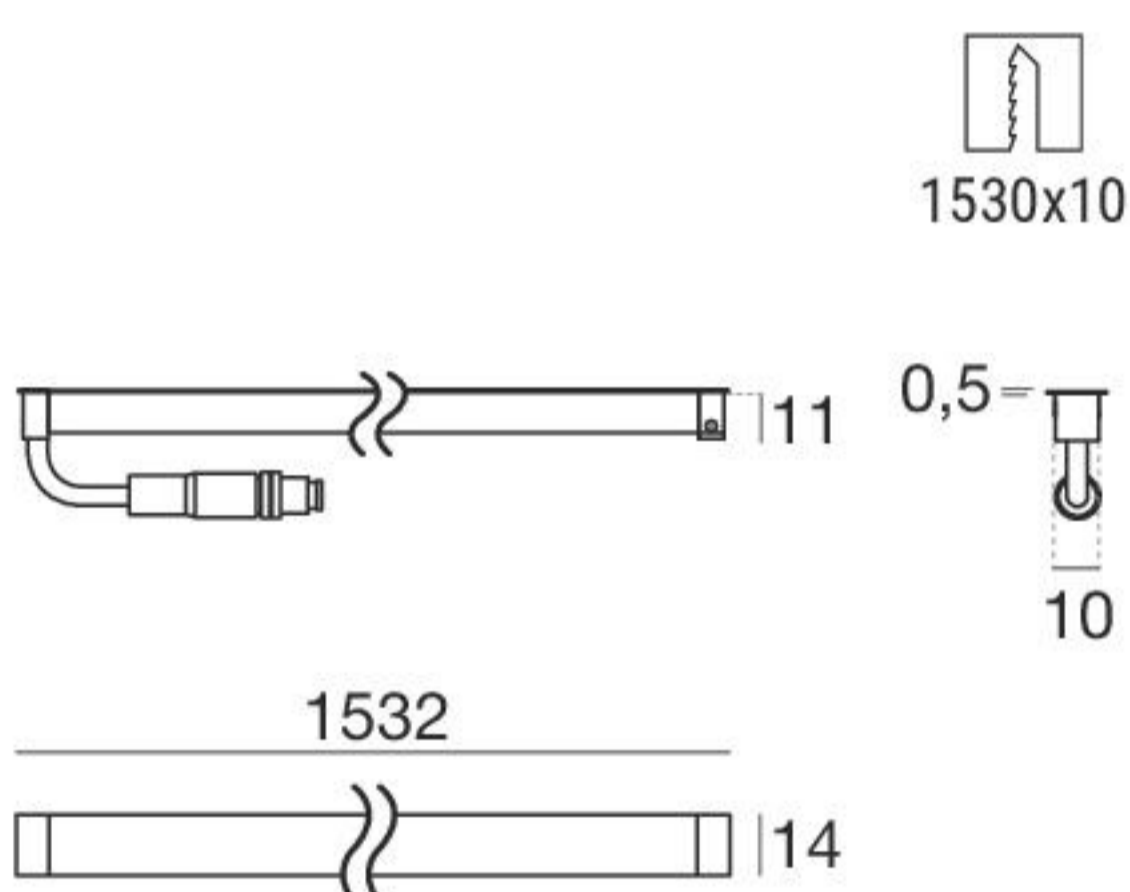

18 W - CRI 80

Opaline 81257	2700K	1260 lm	M	General	00
	3000K	1313 lm	W		
	4000K	1434 lm	N		

Electronics

89179 ON/OFF 1 art.	89359 ON/OFF 1 - 2 art.	99331 ON/OFF 1 - 7 art.	99332 0/1-10V 1 - 7 art.	99722 DALI 1 - 6 art.

Accessories

99231 1 m Cable	99232 1 m Extension