


paseo range

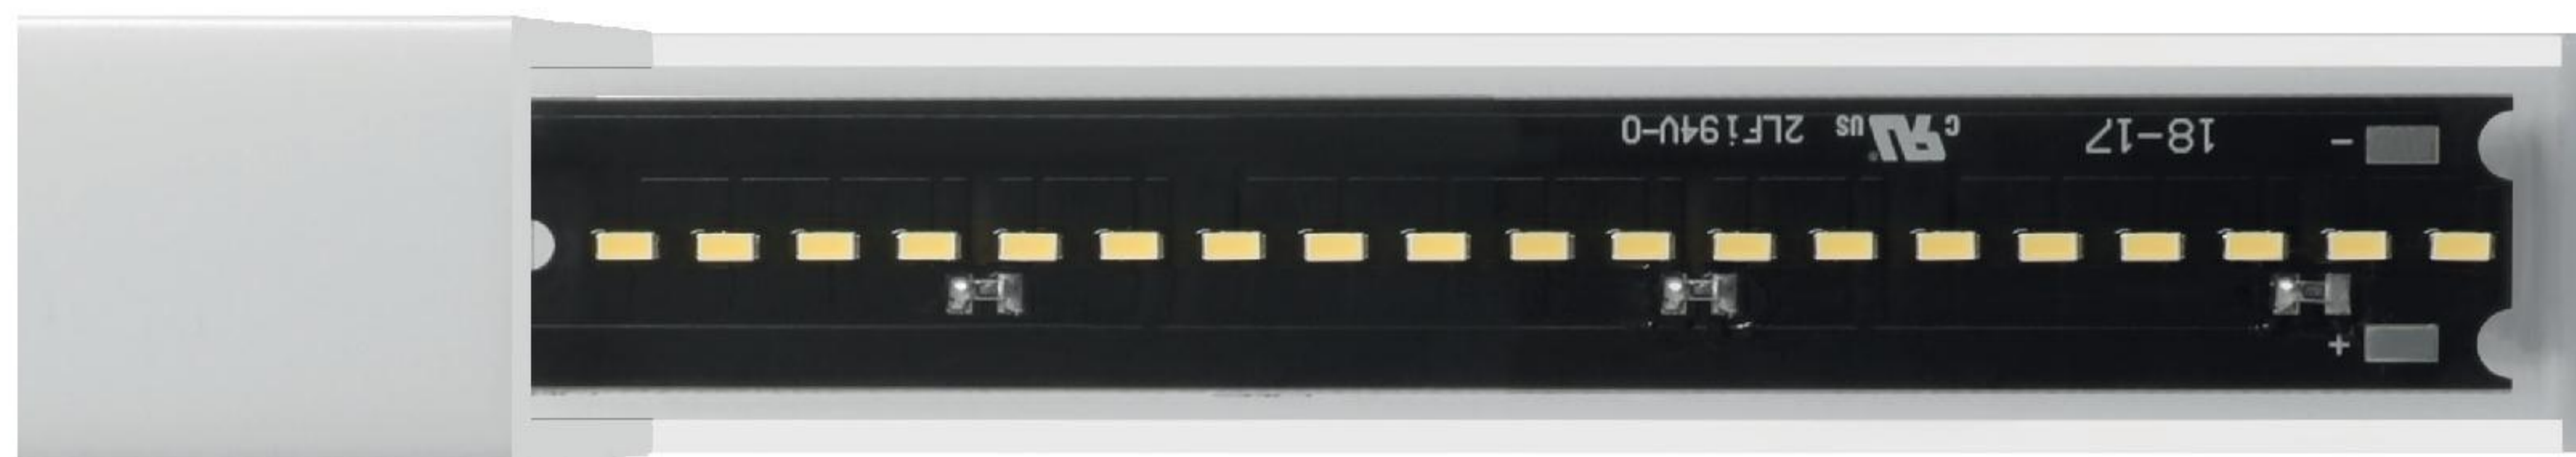

	_L	_L Anti-glare	L_RGBW	_X	_X RGBW
512 mm	6 W	6 W	6 W	-	-
576 mm	-	-	-	7,5 W	7,5 W
1152 mm	13 W	13 W	13 W	15 W	15 W
1452 mm	19 W	19 W	19 W	-	-
Finish	□	□	□	□	□
topLED	2700K 3000K 4000K	2700K 3000K 4000K	RGBW	-	-
powerLED	-	-	-	2700K 3000K 4000K	RGBW+W
Optics	Medium Flood Asymmetric General	Medium Flood Asymmetric	General	Narrow Spot Spot MediumFlood Flood Elliptic Asymmetric General	Elliptic
Driver ⊗	On/Off DALI	On/Off DALI	-	-	-
Driver ⊖	On/Off	On/Off	DMX	On/Off 1-10 V DALI	DMX