


Paseo_L ON/OFF | Linear profiles | 100-240 V | topLED




6 W DC - 6,6 W AC - CRI 80

Transp. 96150	2700K	662 lm	M	Medium Flood	20
	3000K	720 lm	W	Asymmetric	07
	4000K	749 lm	N		
Opaline 81331	2700K	662 lm	M	General	00
	3000K	720 lm	W		
	4000K	749 lm	N		

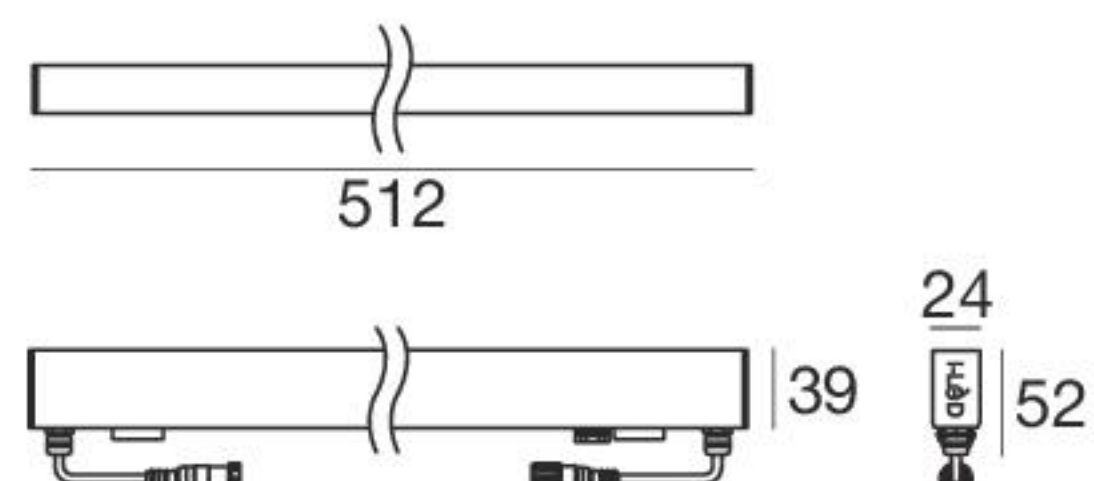


RTG **81332W00**

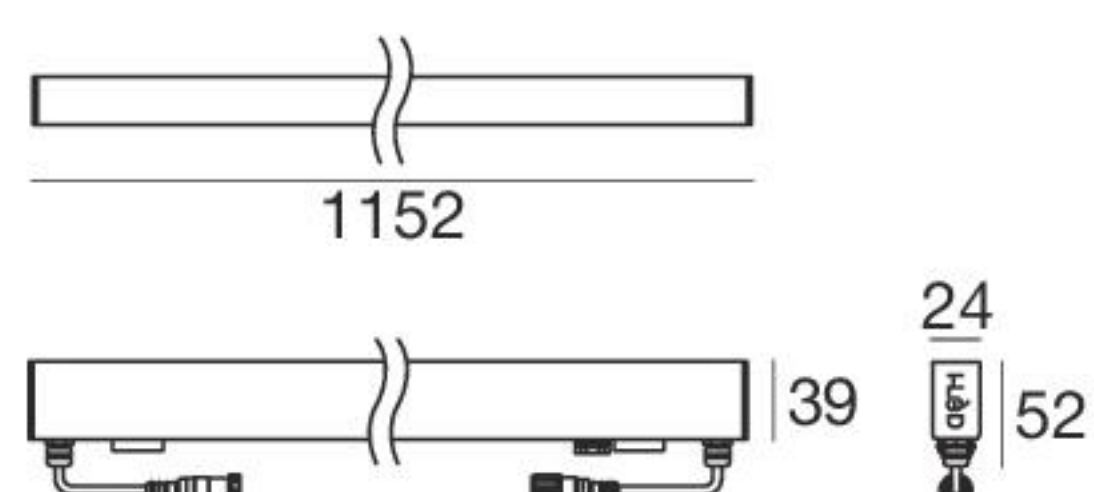

13 W DC - 13,2 W AC - CRI 80

Transp. 96151	2700K	1208 lm	M	Medium Flood	20
	3000K	1313 lm	W	Asymmetric	07
	4000K	1365 lm	N		
Opaline 81332	2700K	1208 lm	M	General	00
	3000K	1313 lm	W		
	4000K	1365 lm	N		

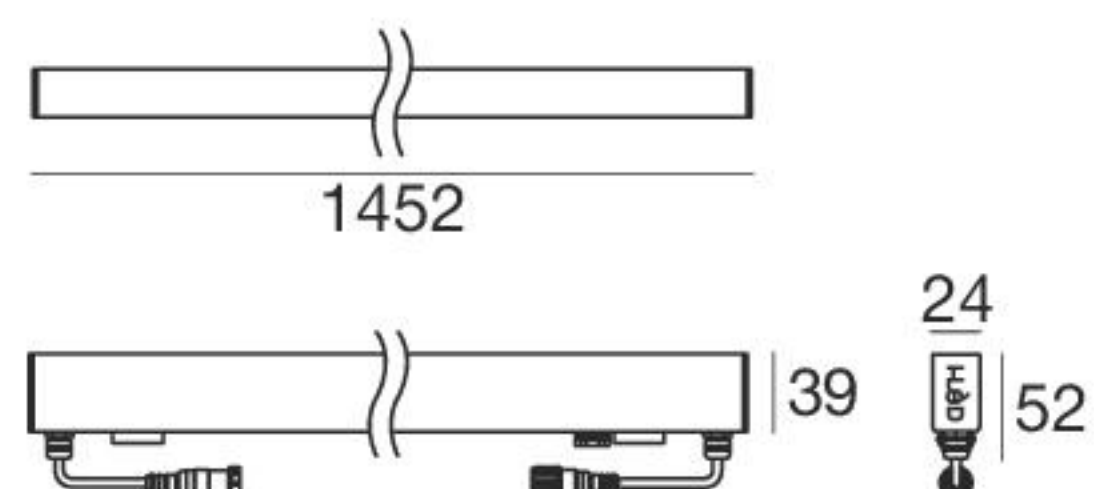

19 W DC - 21 W AC - CRI 80

Transp. 96152	2700K	1913 lm	M	Medium Flood	20
	3000K	2079 lm	W	Asymmetric	07
	4000K	2162 lm	N		
Opaline 81333	2700K	1913 lm	M	General	00
	3000K	2079 lm	W		
	4000K	2162 lm	N		

Cables

99216	89190	98437	98149	89188
1,5 m power cable F 4 pin M12	5 m power cable F 4 pin M12	1 m Extension for power cable M+F 4 pin M12	5 m Extension for power cable M+F 4 pin M12	10 m Extension for power cable M+F 4 pin M12

Installation accessories



Outer casings and fixing systems