

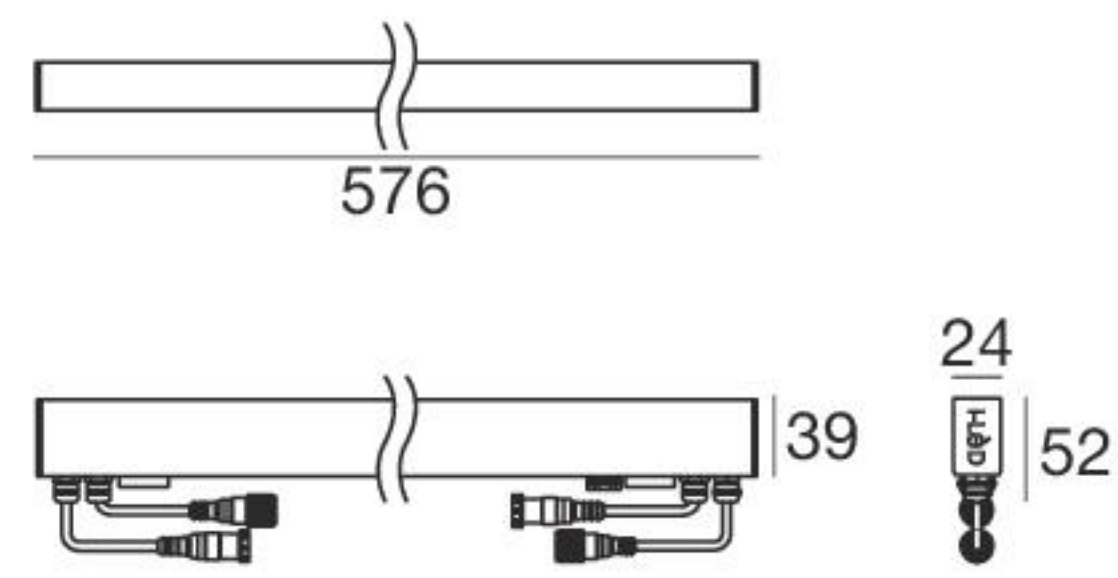


Paseo_X DALI | Linear profiles | 100-240 V | powerLED 14 W/m

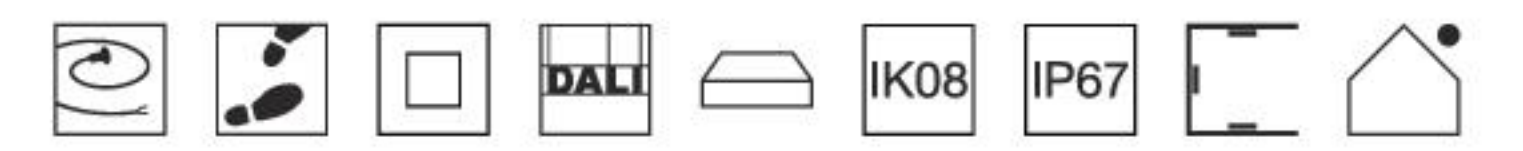

7 W DC - 7,7 W AC - CRI 80


Transp. 97256	2700K	1056 lm	M	Narrow Spot	08
12 LEDs	3000K	1128 lm	W	Spot	15
	4000K	1212 lm	N	Medium Flood	30
				Flood	60
				Elliptic	25

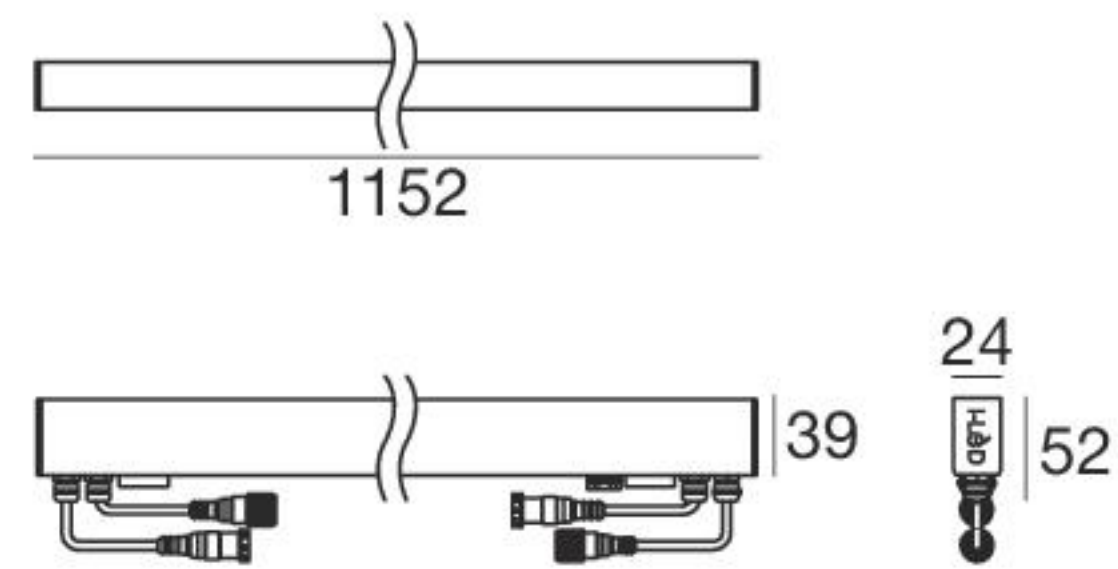

17,3 W DC - 19,4 W AC - CRI 80


Transp. 97612	2700K	2112 lm	M	Narrow Spot	08
24 LEDs	3000K	2256 lm	W	Spot	15
	4000K	2424 lm	N	Medium Flood	30
				Flood	60
				Elliptic	25

Paseo_X RGBW DMX | Linear profiles | 90-264 V | powerLED 18 W/m

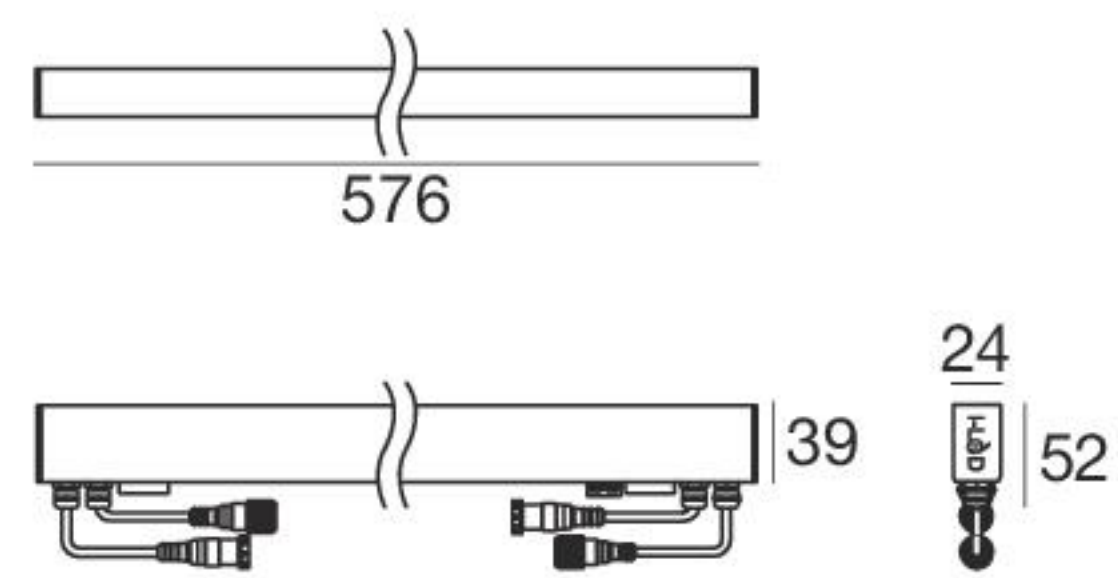

8 W DC - 9 W AC - CRI 80

Transp. 97247	RGBW natural white	Q	Elliptic	25
16 LEDs	RGBW warm white	V		

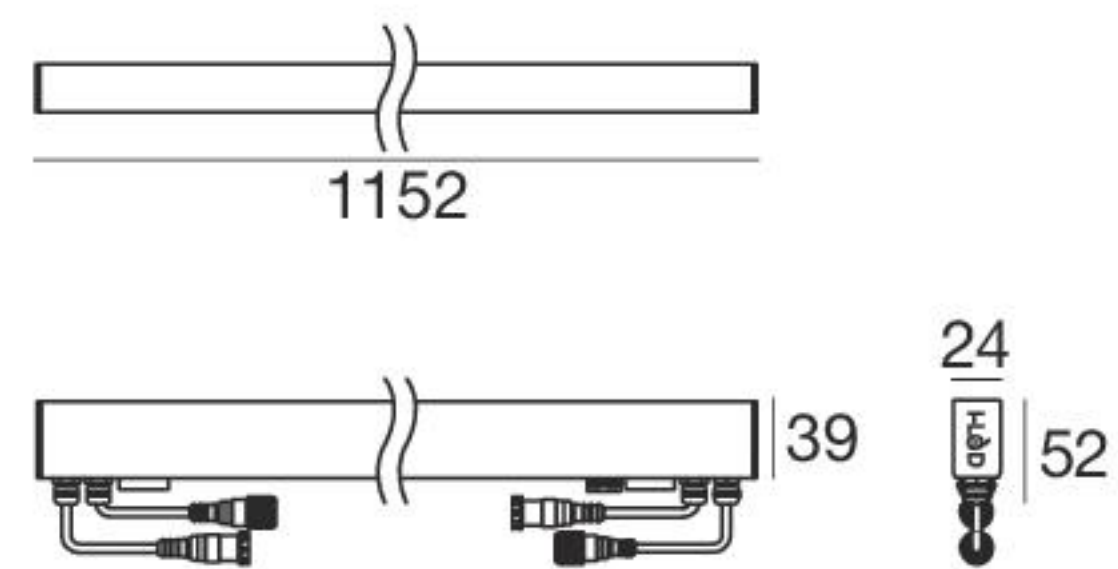

17 W DC - 19 W AC - CRI 80

Transp. 97609	RGBW natural white	Q	Elliptic	25
32 LEDs	RGBW warm white	V		

Cables

99216 1,5 m power cable F 4 pin M12	89190 5 m power cable F 4 pin M12	98437 1 m Extension for power cable M+F 4 pin M12	98149 5 m Extension for power cable M+F 4 pin M12	89188 10 m Extension for power cable M+F 4 pin M12	89189 5 m DMX cable M 5 pin M12
89186 5 m DMX cable M 5 pin M12 + M 3 pin XLR	98494 5 m DMX cable M 5 pin M12 + F 3 pin XLR	98493 5 m DMX cable M 5 pin M12 + M 5 pin XLR	98994 1 m DMX extension 1-10 V M+F	89993 5 m DMX extension 1-10 V M+F	89187 10 m DMX extension 1-10 V M+F
89362 5 m 1-10V_DALI cable F 5 pin M12	89361 10 m 1-10V_DALI extension M+F 5 pin M12				

Installation accessories



Outer casings and fixing systems

Electronics



DMX controllers
995



89564
DMX address



89365
DMX LINE
Clouser 120 Ohm