



6 W DC - 7 W AC

Anod. Al.	93594	2700K	703 lm	M	Narrow Spot	08
	3 LEDs	3000K	703 lm	W	Medium Flood	20
		4000K	749 lm	N	Flood	50
					Wide Flood	90
					Elliptic	25
					Asymmetric	07

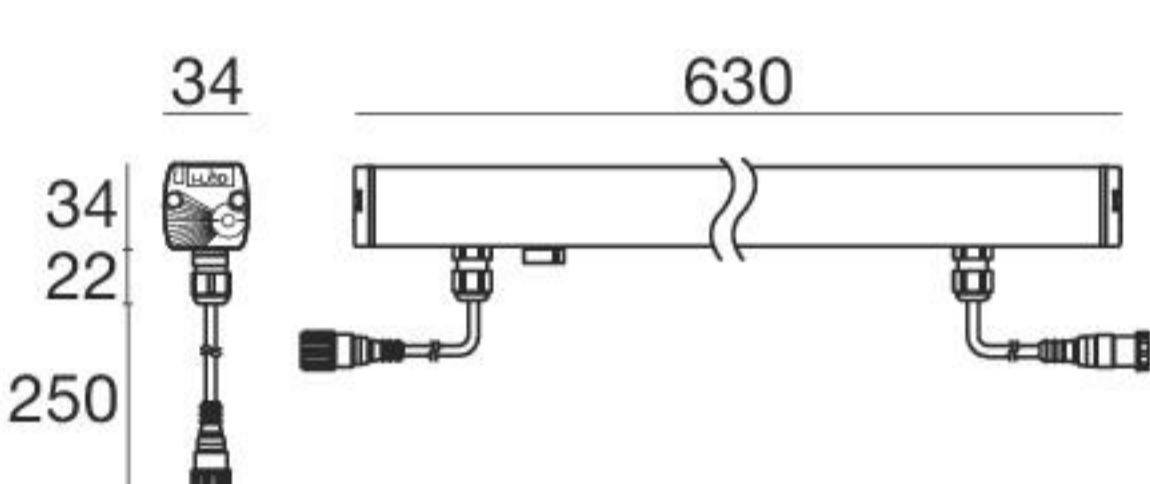


12 W DC - 13 W AC

Anod. Al.	93595	2700K	1406 lm	M	Narrow Spot	08
	6 LEDs	3000K	1406 lm	W	Medium Flood	20
		4000K	1498 lm	N	Flood	50
					Wide Flood	90
					Elliptic	25
					Asymmetric	07

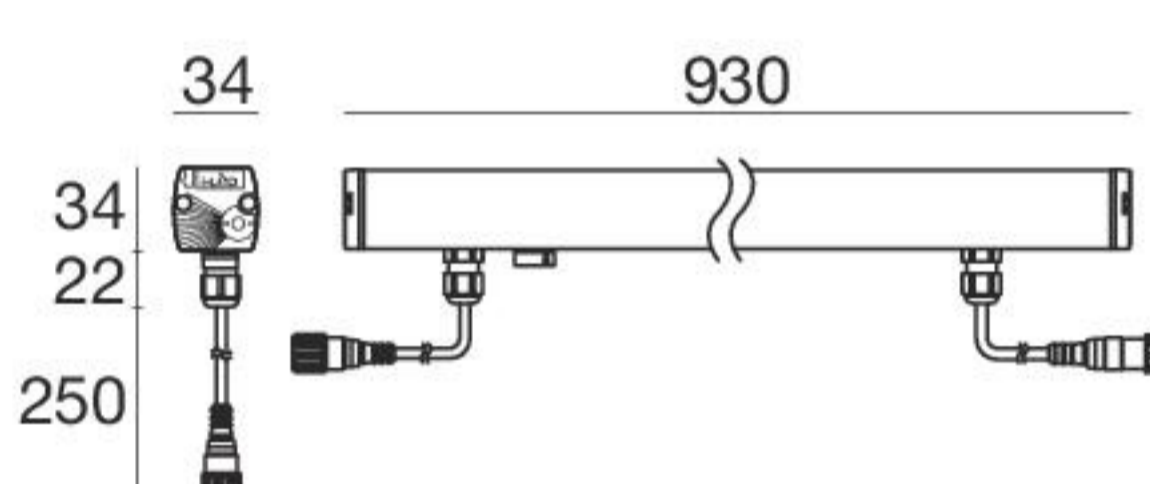

18 W DC - 20 W AC

Anod. Al.	93596	2700K	2109 lm	M	Narrow Spot	08
	9 LEDs	3000K	2109 lm	W	Medium Flood	20
		4000K	2247 lm	N	Flood	50
					Wide Flood	90
					Elliptic	25
					Asymmetric	07

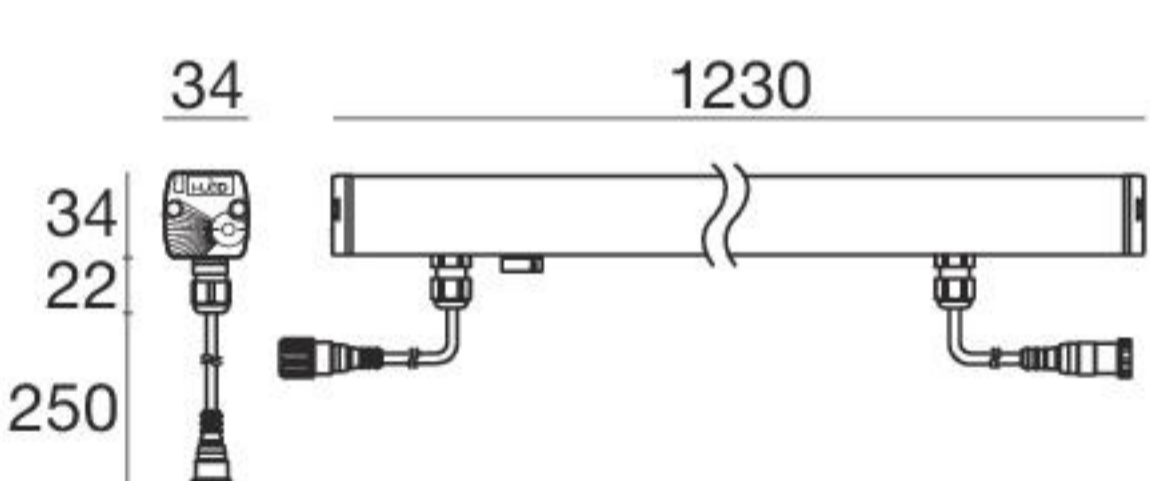

24 W DC - 26 W AC

Anod. Al.	93605	2700K	2812 lm	M	Narrow Spot	08
	12 LEDs	3000K	2812 lm	W	Medium Flood	20
		4000K	2996 lm	N	Flood	50
					Wide Flood	90
					Elliptic	25
					Asymmetric	07

Steel fixing brackets

	46-67 mm 98949
	90 mm 89045
	150 mm 89046
	300 mm 89047

Anti-glaring accessory

	366 mm 98782
	630 mm 98783
	930 mm 98784
	1230 mm 98785

Cables

99216	89190	98437	98149	89188
1,5 m power cable F 4 pin M12	5 m power cable F 4 pin M12	1 m Extension for power cable M+F 4 pin M12	5 m Extension for power cable M+F 4 pin M12	10 m Extension for power cable M+F 4 pin M12