

8 W DC - 9 W AC

Anod. Al.	On/Off	81702	2700K	956 lm	M	Narrow Spot	08
			3000K	1025 lm	W	Medium Flood	20
			4000K	1164 lm	N	Flood	50
						Wide Flood	90
						Elliptic	25
						Asymmetric	07

15,1 W DC - 17,1 W AC

Anod. Al.	On/Off	81703	2700K	1835 lm	M	Narrow Spot	08
Anod. Al.	1-10 V	81708	3000K	1964 lm	W	Medium Flood	20
			4000K	2238 lm	N	Flood	50
						Wide Flood	90
						Elliptic	25
						Asymmetric	07

23,1 W DC - 26,2 W AC

Anod. Al.	On/Off	81704	2700K	2753 lm	M	Narrow Spot	08
Anod. Al.	1-10 V	81709	3000K	2946 lm	W	Medium Flood	20
			4000K	3357 lm	N	Flood	50
						Wide Flood	90
						Elliptic	25
						Asymmetric	07


31,8 W DC - 35,4 W AC

Anod. Al.	On/Off	81705	2700K	3671 lm	M	Narrow Spot	08
Anod. Al.	1-10 V	81710	3000K	3928 lm	W	Medium Flood	20
			4000K	4476 lm	N	Flood	50
						Wide Flood	90
						Elliptic	25
						Asymmetric	07


37,4 W DC - 44 W AC

Anod. Al.	On/Off	81706	2700K	4588 lm	M	Narrow Spot	08
Anod. Al.	1-10 V	81711	3000K	4910 lm	W	Medium Flood	20
			4000K	5594 lm	N	Flood	50
						Wide Flood	90
						Elliptic	25
						Asymmetric	07

On/Off

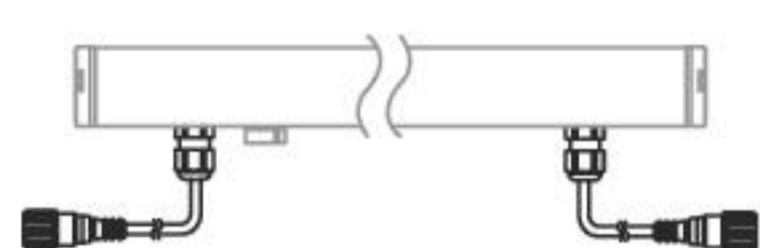

1-10 V

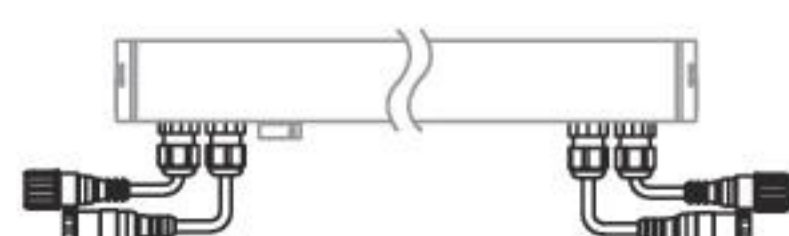

Steel fixing brackets

	46-67 mm	98949
	90 mm	89045
	150 mm	89046
	300 mm	89047

Anti-glaring accessory

	366 mm	98782
	630 mm	98783
	930 mm	98784
	1230 mm	98785
	1530 mm	99778

Cables

99216 1,5 m power cable F 4 pin M12	89190 5 m power cable F 4 pin M12	98437 1 m Extension for power cable M+F 4 pin M12	98149 5 m Extension for power cable M+F 4 pin M12	89188 10 m Extension for power cable M+F 4 pin M12
89362 5 m 1-10V_DALI cable F 5 pin M12	89361 10 m 1-10V_ DALI extension M+F 5 pin M12			