



8 W DC - 9 W AC

Anod. Al.	On/Off	81465	2700K	956 lm	M	Narrow Spot	08
			3000K	1025 lm	W	Medium Flood	20
			4000K	1164 lm	N	Flood	50
						Wide Flood	90
						Elliptic	25
						Asymmetric	07

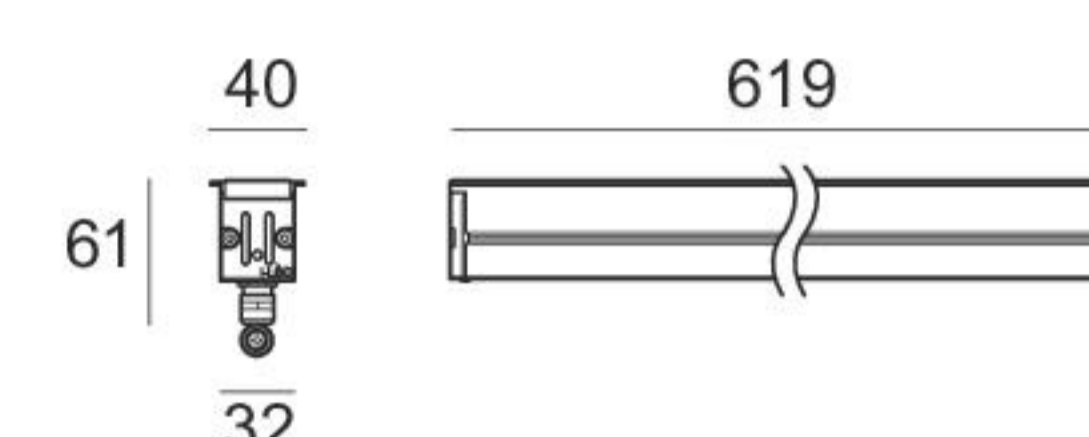


15,1W DC - 17,1 W AC

Anod. Al.	On/Off	81466	2700K	1835 lm	M	Narrow Spot	08
Anod. Al.	1-10 V	81682	3000K	1964 lm	W	Medium Flood	20
			4000K	2238 lm	N	Flood	50
						Wide Flood	90
						Elliptic	25
						Asymmetric	07

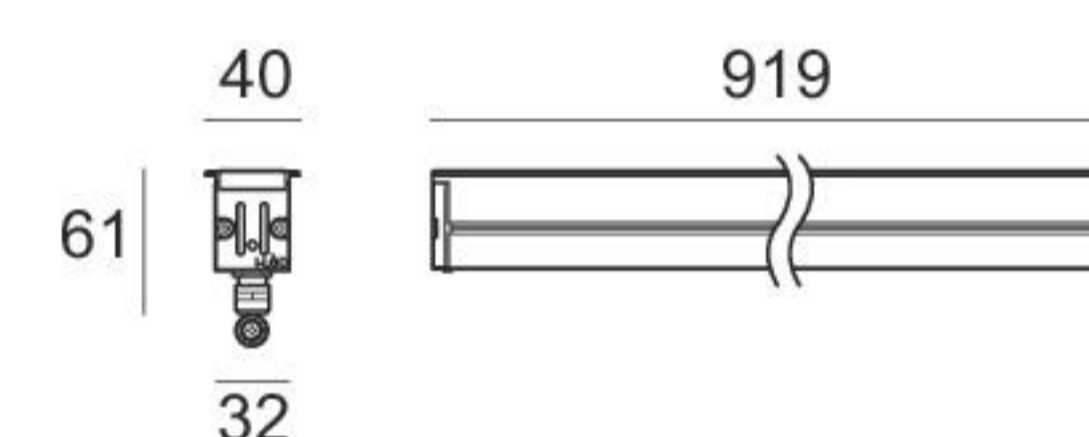


23,1 W DC - 26,2 W AC

Anod. Al.	On/Off	81467	2700K	2753 lm	M	Narrow Spot	08
Anod. Al.	1-10 V	81683	3000K	2946 lm	W	Medium Flood	20
			4000K	3357 lm	N	Flood	50
						Wide Flood	90
						Elliptic	25
						Asymmetric	07

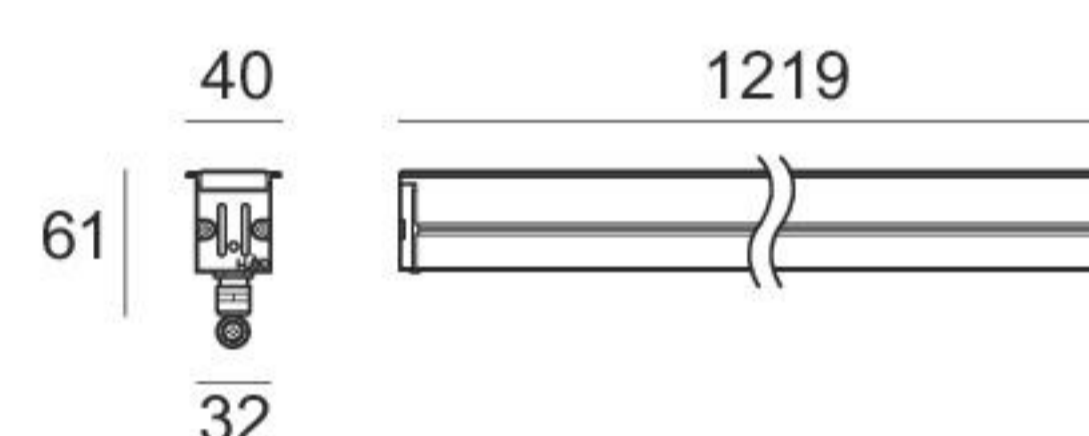



31,8 W DC - 35,4 W AC

Anod. Al.	On/Off	81468	2700K	3671 lm	M	Narrow Spot	08
Anod. Al.	1-10 V	81684	3000K	3928 lm	W	Medium Flood	20
			4000K	4476 lm	N	Flood	50
						Wide Flood	90
						Elliptic	25
						Asymmetric	07

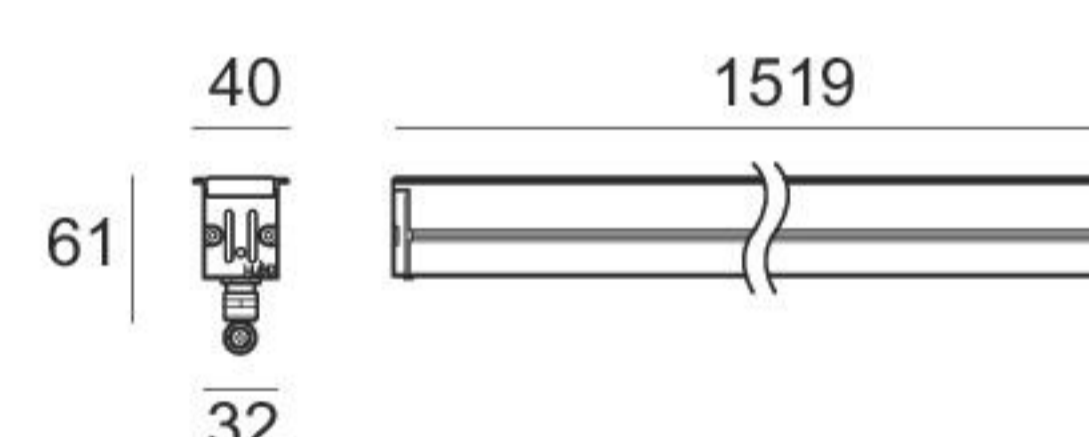

37,4 W DC - 44 W AC

Anod. Al.	On/Off	81624	2700K	4588 lm	M	Narrow Spot	08
Anod. Al.	1-10 V	81685	3000K	4910 lm	W	Medium Flood	20
			4000K	5594 lm	N	Flood	50
						Wide Flood	90
						Elliptic	25
						Asymmetric	07

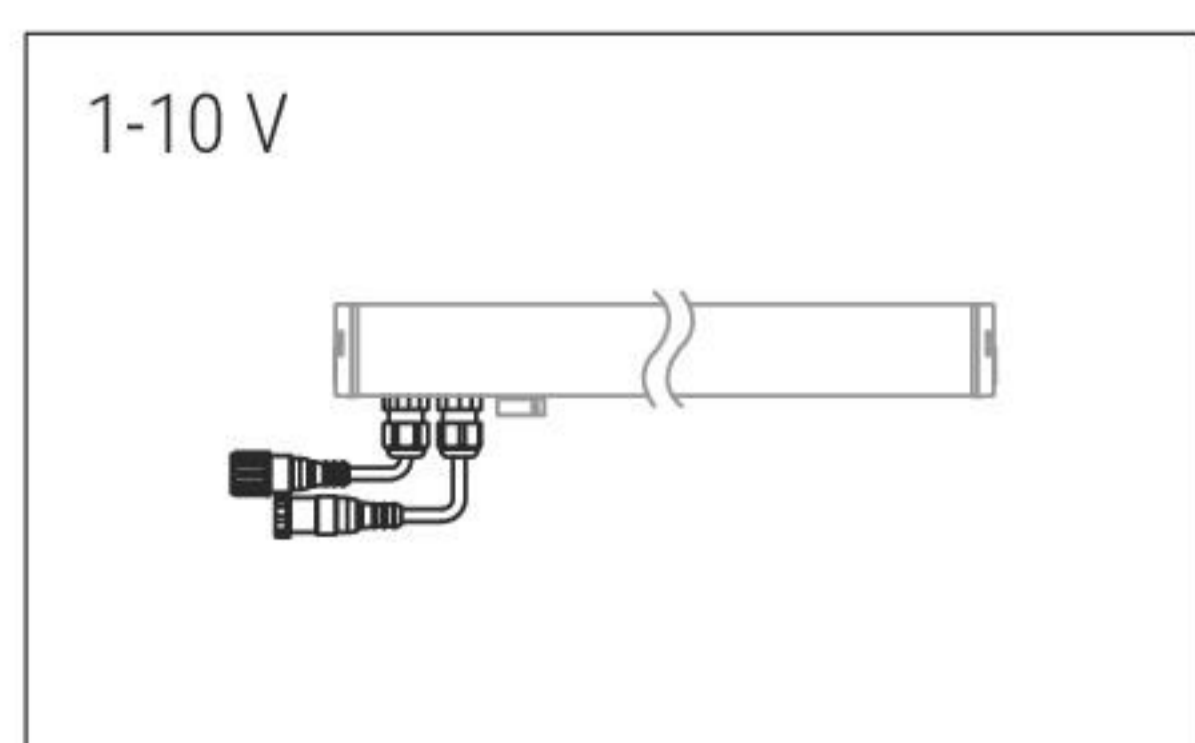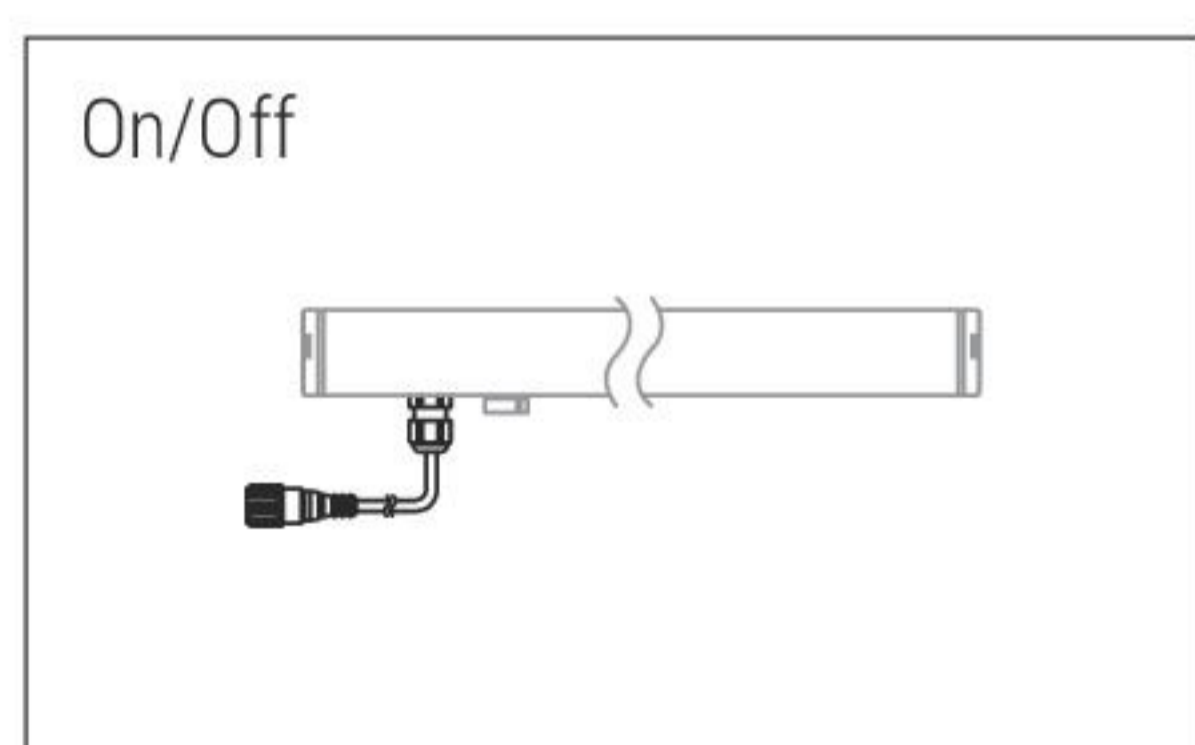

Outer casings

360 mm	99761
620 mm	99762
920 mm	99763
1220 mm	99764
1520 mm	99765

2 x Line sealing caps

99766

Ceiling-mounted recessed installation spring

99818

Cables

99216	89190	98437	98149	89188
1,5 m power cable F 4 pin M12	5 m power cable F 4 pin M12	1 m Extension for power cable M+F 4 pin M12	5 m Extension for power cable M+F 4 pin M12	10 m Extension for power cable M+F 4 pin M12
89362	89361			
5 m 1-10V_DALI cable F 5 pin M12	10 m 1-10V_ DALI extension M+F 5 pin M12			