

Balance - CRI 92

White	90878	2700 K	2598 lm	M	Spot	15
Black	90879	3000 K	2794 lm	W	Medium Flood	30
		4000 K	2990 lm	N	Flood	60

HC

White	90882
Black	90883


Efficiency - CRI 80

White	90876	2700 K	3210 lm	M	Spot	15
Black	90877	3000 K	3341 lm	W	Medium Flood	30
		4000 K	3431 lm	N	Flood	60


HC

White	90880
Black	90881


Electronics

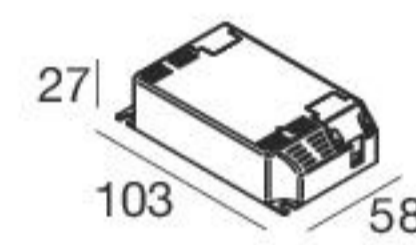

99112
ON/OFF
1 art.

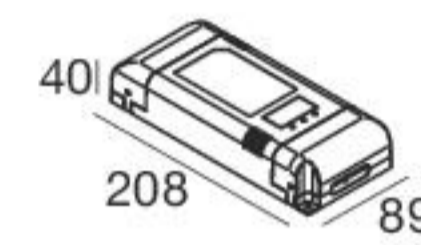


99188
0/1-10V DALI
1 art.

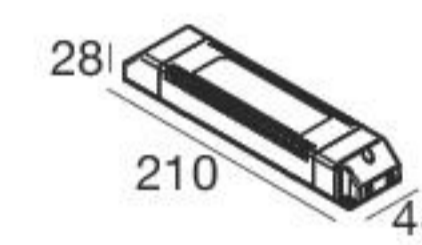


99330
DALI
1 art.

90876W30

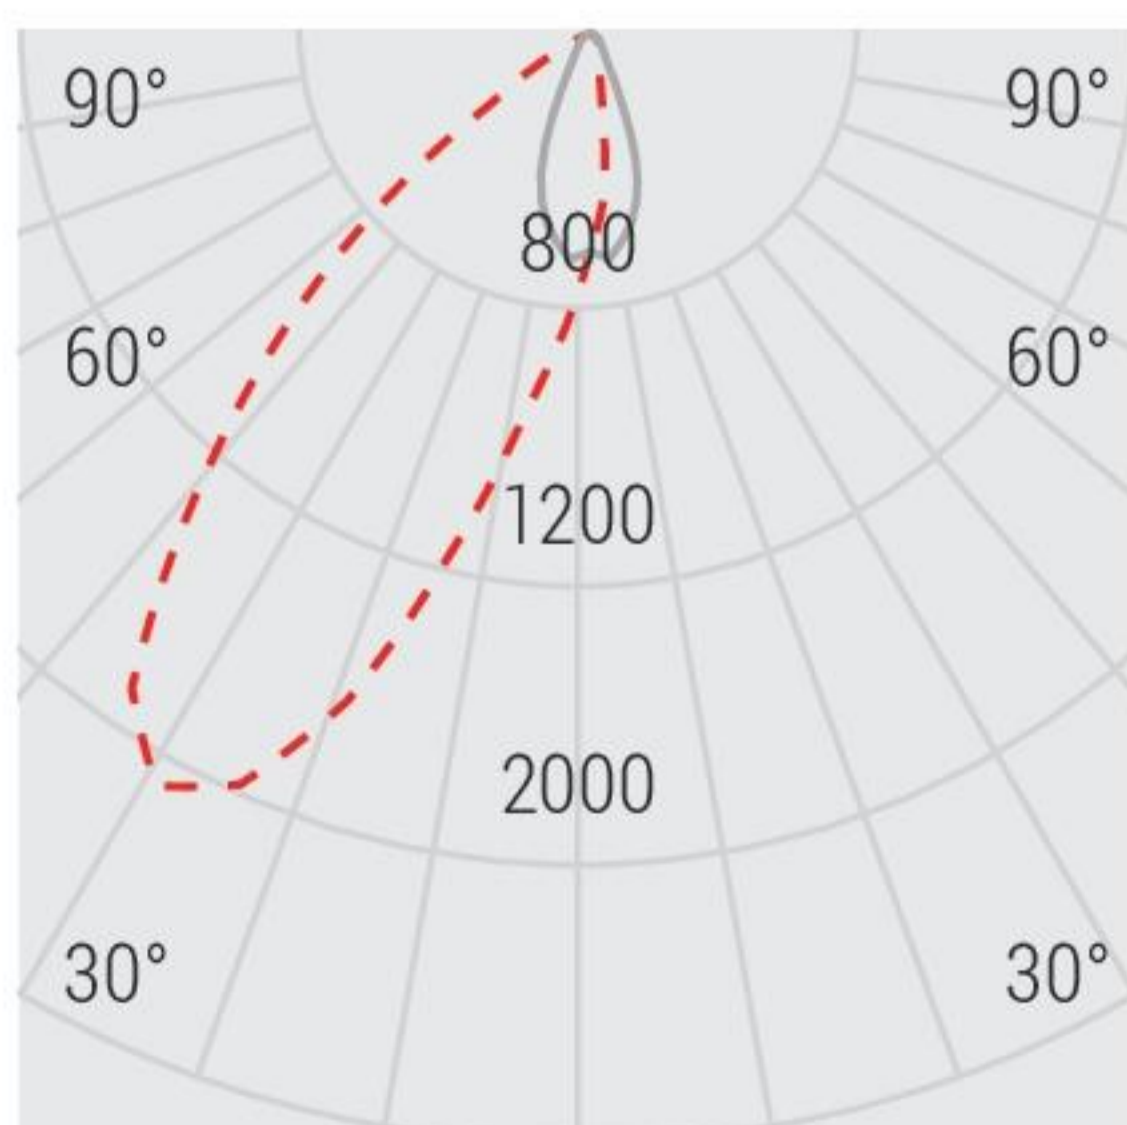


Photometric curve

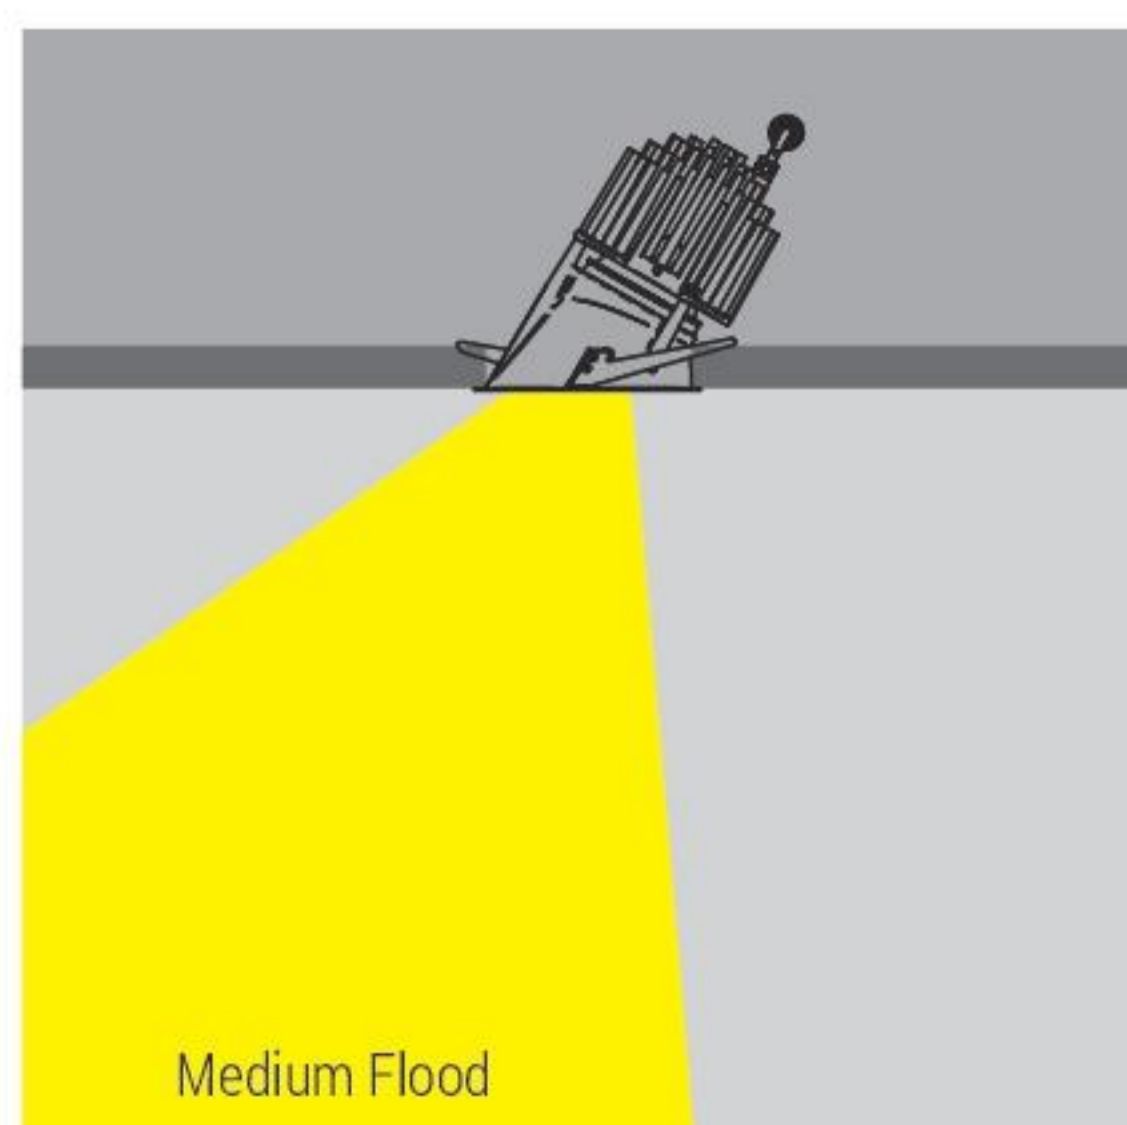

Light beam



100 LUX 250 LUX 300 LUX 500 LUX 1000 LUX

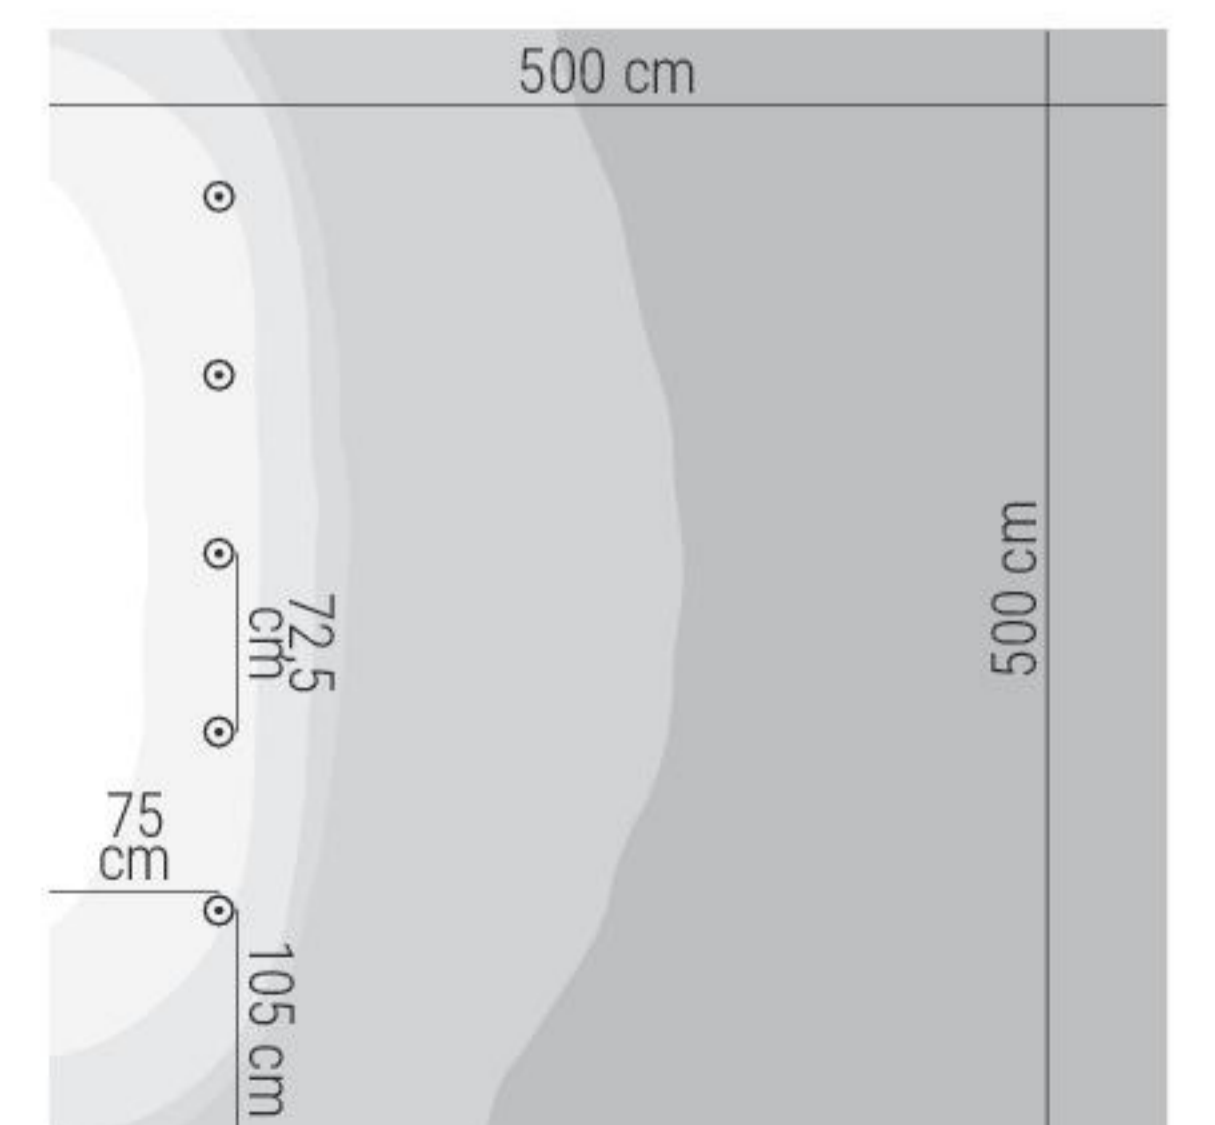

Floor plan