
Grazing light

The internal Led source gradient was studied for the best lighting distribution, along the pathways..



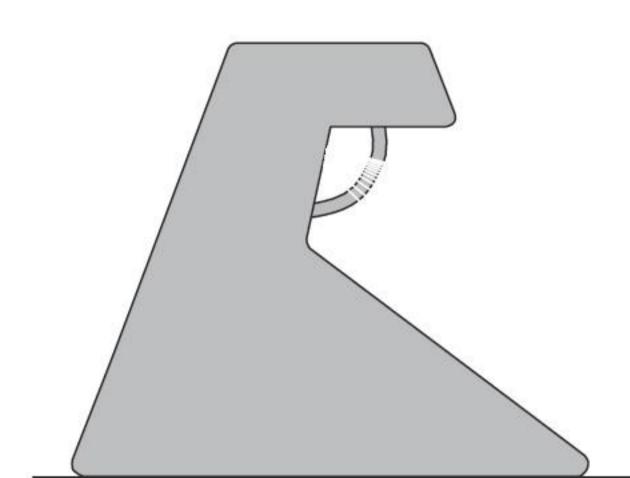

Range

Dirigo is available as single module or prepared for continuous line installation.

Single module (L. 1mt)

Sealed and complete source profile, end caps, integrated driver 24V DCo.

Continuous line installation modules

On measure cutting profiles, prepared for continuous line installation up to 5/10m. Led source available with a separated code and on measure cutting.

Mechanical connection joints between profiles.

Remote driver 24 V DC.

Complete element version



System

Robust design

The opposing level structure of Dirigo's single profile makes this appliance particularly sturdy and resistant. The absence of raw edges makes it ideal for public and private outdoor applications.

Dirigo can be walked on and is extremely safe for users.



Linear lights 802