

Balance - CRI 92

|       |              |        |         |          |              |           |
|-------|--------------|--------|---------|----------|--------------|-----------|
| White | <b>90886</b> | 2700 K | 2598 lm | <b>M</b> | Spot         | <b>15</b> |
| Black | <b>90887</b> | 3000 K | 2794 lm | <b>W</b> | Medium Flood | <b>30</b> |
|       |              | 4000 K | 2990 lm | <b>N</b> | Flood        | <b>60</b> |




|       |              |
|-------|--------------|
| White | <b>90890</b> |
| Black | <b>90891</b> |

Efficiency - CRI 80


|       |              |        |         |          |              |           |
|-------|--------------|--------|---------|----------|--------------|-----------|
| White | <b>90884</b> | 2700 K | 3210 lm | <b>M</b> | Spot         | <b>15</b> |
| Black | <b>90885</b> | 3000 K | 3431 lm | <b>W</b> | Medium Flood | <b>30</b> |
|       |              | 4000 K | 3431 lm | <b>N</b> | Flood        | <b>60</b> |




|       |              |
|-------|--------------|
| White | <b>90888</b> |
| Black | <b>90889</b> |

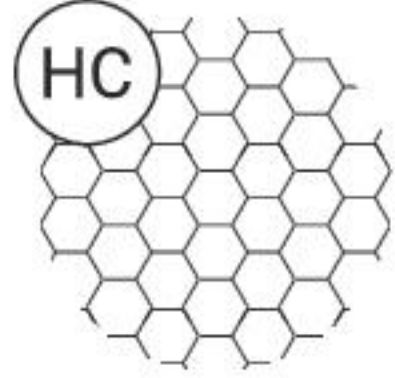


Electronics

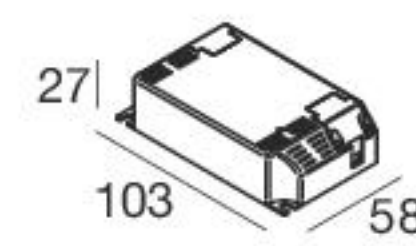

**99112**  
ON/OFF  
1 art.

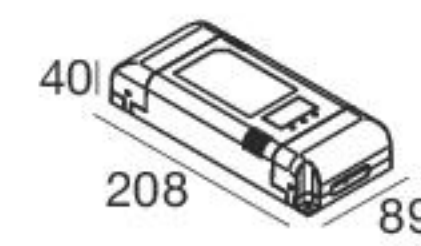


**99188**  
0/1-10V DALI  
1 art.

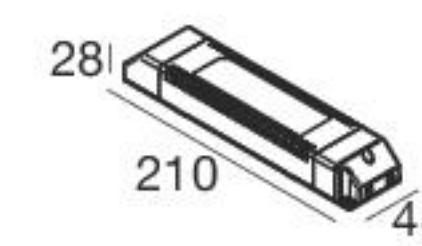


**99330**  
DALI  
1 art.

90884W60

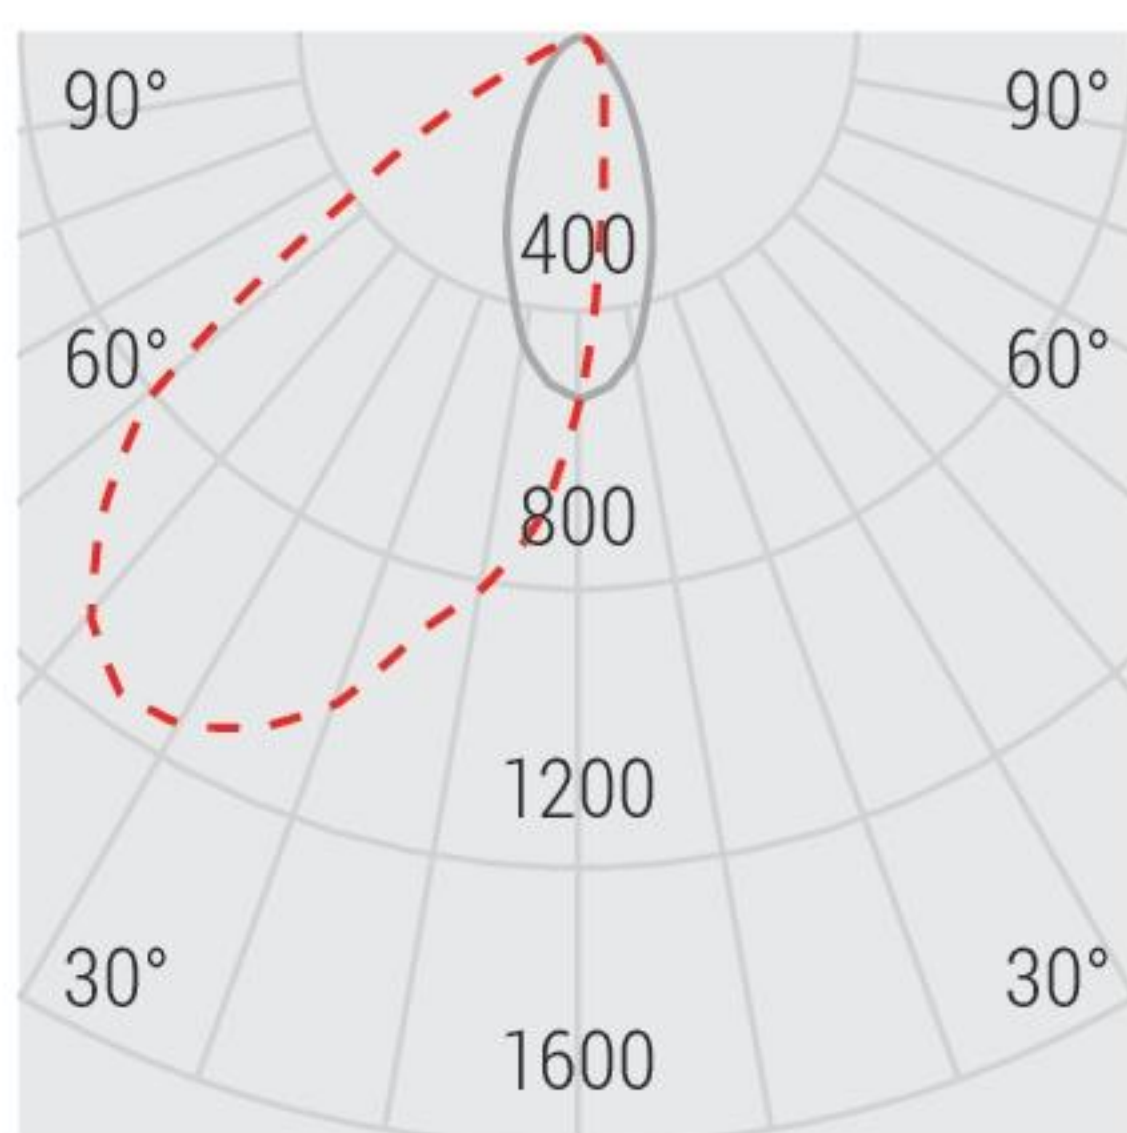


Photometric curve

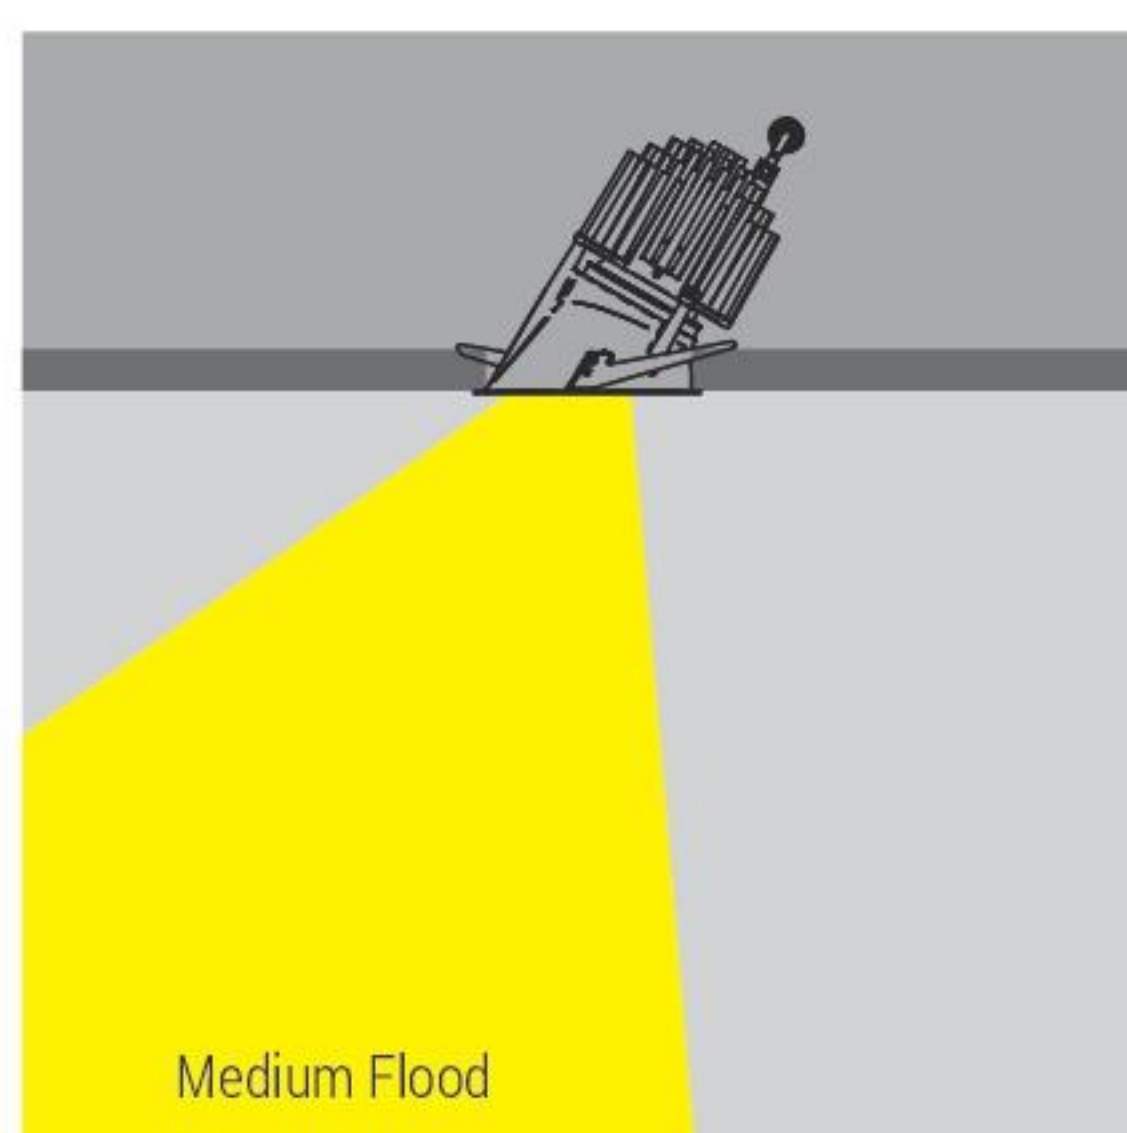

Light beam



25 LUX 300 LUX 500 LUX 700 LUX 750 LUX 900 LUX 1000 LUX

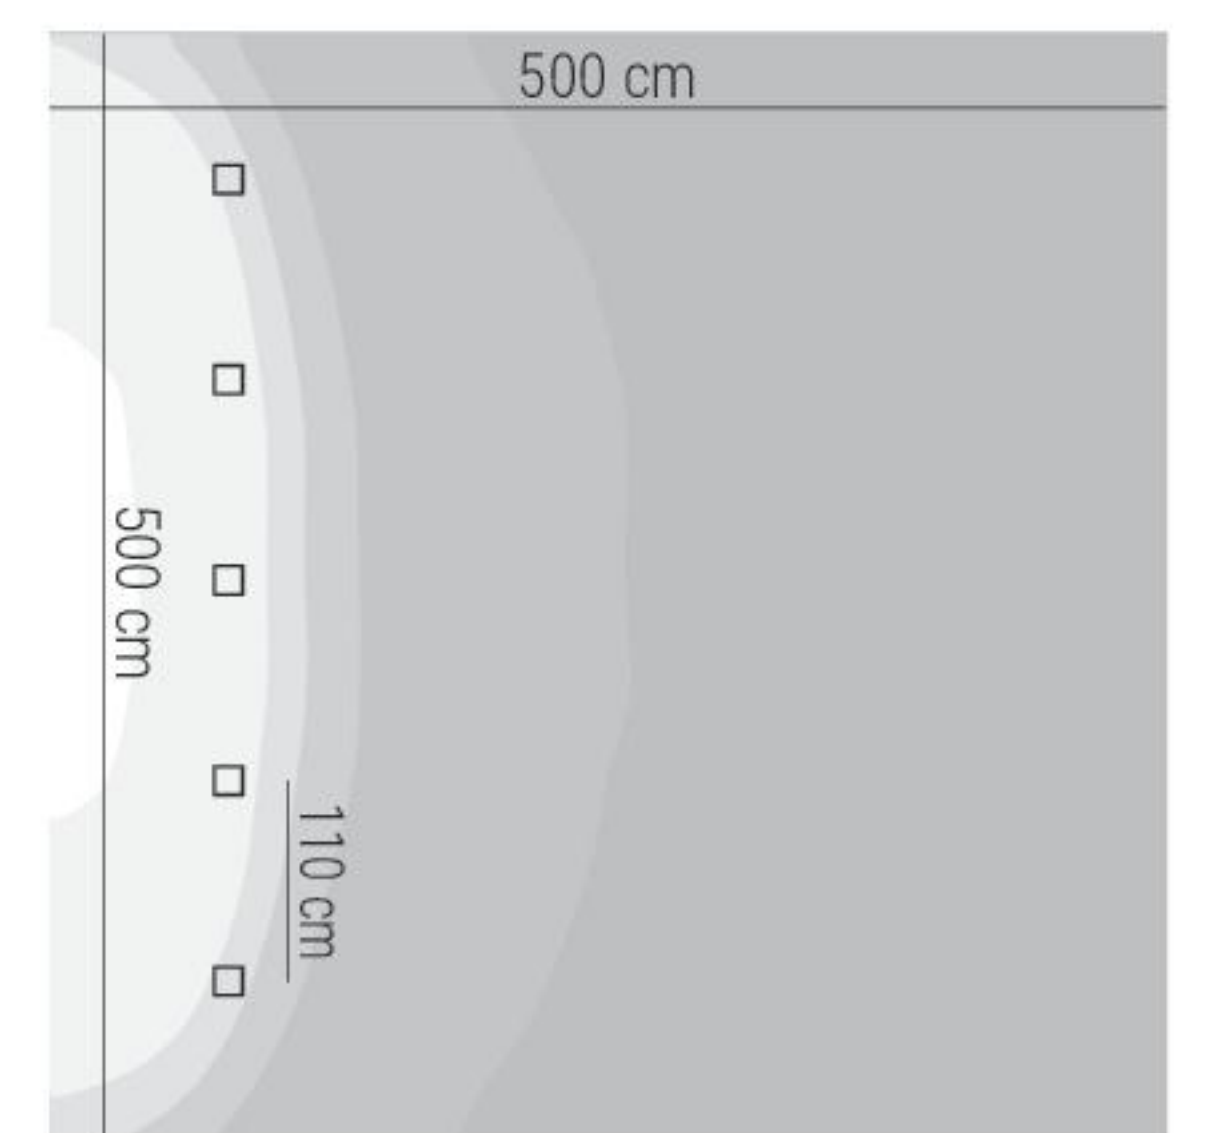

Floor plan