


Layer

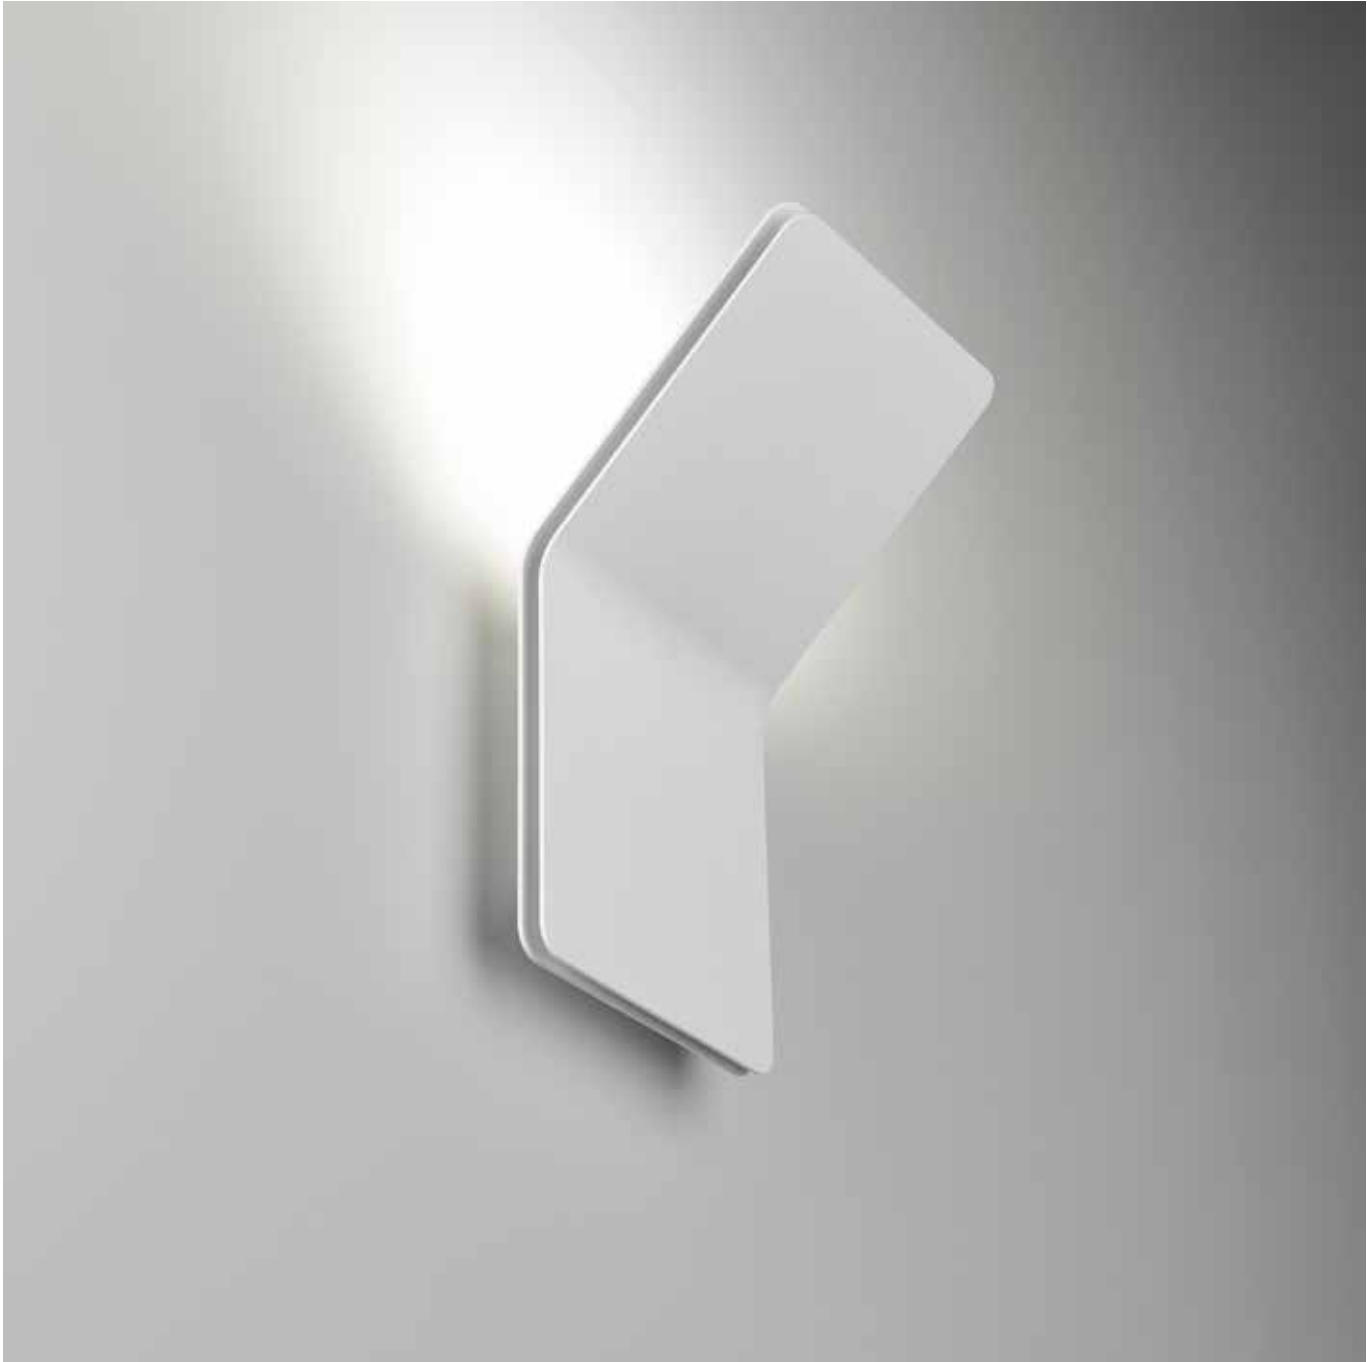

Layer

Applique LED da parete per interni.
Indoor wall LED applique.

Led : 3000°K (W), 4000°K (N)

Optic : OP (vetrino opale I opal glass) (120°)



Potenza I Power 18W I 220/240Vac


Flusso Nominale I Total Efficiency Lm 1872 (W) I 1980 (N)

finitura I finishes	cod.	+	Led	+	Opt
Alluminio Anodizzato Argento Silver Anodized Aluminium	30666 __		W		
Alluminio Anodizzato Nero Black Anodized Aluminium	30671 __	+	N	+	OP
Bianco I White	31653 __				




IP 40

DIMENSIONI I DIMENSIONS

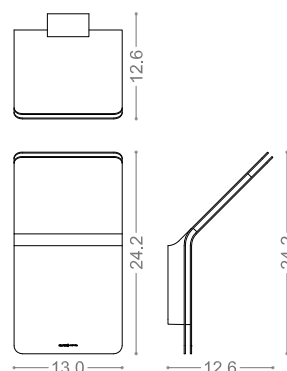


FOTOMETRIE I PHOTOMETRIC DIAGRAMS

LAYER - 18W - 100°

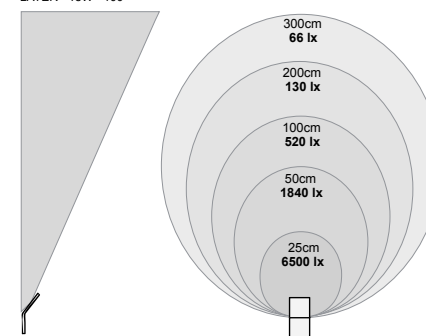

SISTEMA DI FISSAGGIO I FIXING SYSTEM



Non prevede particolari predisposizioni (solo foratura per tasselli e fissaggio con viti)
It doesn't foresee particular predisposition (only perforation for wedges and fixing with screw)

INC/S

Disponibile su richiesta IP44
Available on request IP44

Dimmerabile con dimmer a taglio di fase per LED (vedi Alimentatori vedi pag. Accessori e Alimentatori)
Dimmable with a cut phase LED (see Transformers see page Accessories and Transformers)

