

# wall mira 65 | 5W


SINGLE DIFFUSE

## TECHNICAL SPECIFICATIONS

Source lamp	LED 5 W
Total wattage	5 W
Voltage	24 Vdc
Control	Power supply not included • dimmable on request
Light colour	3000 K • 4000 K • other colours on request
Luminous flux *Source flux	88 lm (480 lm*) @ 3000 K 88 lm (480 lm*) @ 4000 K
Luminous efficacy	17.6 lm/W @ 3000 K 17.6 lm/W @ 4000 K
McADAM steps	3
Beam	90°
CRI	> 90
Life time	L70 > 50.000 h Ta 25°C L70 > 50.000 h Ta 40°C
Energy efficiency class	A++
IP rating	IP 66
IK rating	IK 08
Insulation class	III

### SINGLE DIFFUSE

Source lamp	LED 5 W
Total wattage	5 W
Voltage	24 Vdc
Control	Power supply not included • dimmable on request
Light colour	3000 K • 4000 K • other colours on request
Luminous flux *Source flux	88 lm (480 lm*) @ 3000 K 88 lm (480 lm*) @ 4000 K
Luminous efficacy	17.6 lm/W @ 3000 K 17.6 lm/W @ 4000 K
McADAM steps	3
Beam	90°
CRI	> 90
Life time	L70 > 50.000 h Ta 25°C L70 > 50.000 h Ta 40°C
Energy efficiency class	A++
IP rating	IP 66
IK rating	IK 08
Insulation class	III

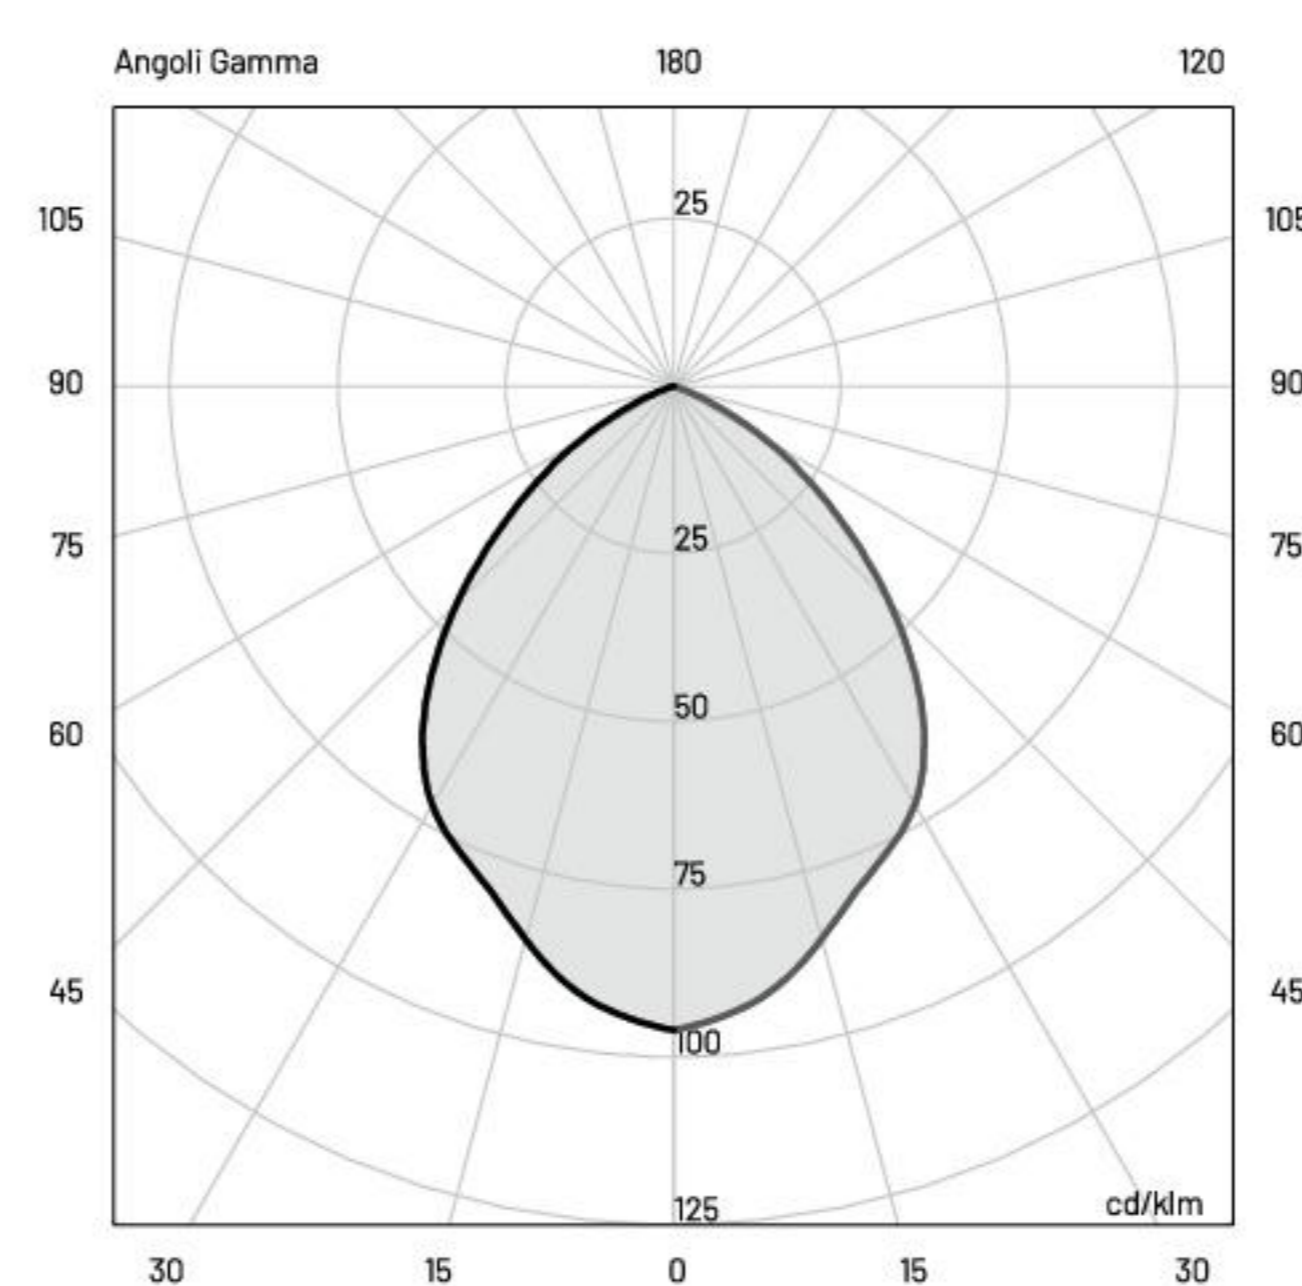

### E (LUX)

H(m)	lux (3000 K)	lux (4000 K)	Ø(m)
1.00	48	48	1.94
2.00	12	12	3.88
3.00	5	5	5.82
4.00	3	3	7.76
5.00	2	2	9.7