

SINGLE SPOT • SINGLE FLOOD

TECHNICAL SPECIFICATIONS

Source lamp

Total wattage

Voltage

Control

Light colour

Luminous flux
*Source flux

Luminous efficacy

McADAM steps

Beam

CRI

Life time

Energy efficiency class

IP rating

IK rating

Insulation class

SINGLE SPOT

LED 3 W

5.5 W

220-240 Vac, 50-60 Hz

On/Off • dimmable on request

3000 K • other colours on request

15 lm (260 lm*)

3 lm/W

3

10°

> 90

L70 > 50.000 h Ta 25°C
L70 > 50.000 h Ta 40°C

A++

IP 65

IK 08

I

SINGLE FLOOD

LED 3 W

5.5 W

220-240 Vac, 50-60 Hz

On/Off • dimmable on request

3000 K • other colours on request

128 lm (260 lm*)

24 lm/W

3

45°

> 90


L70 > 50.000 h Ta 25°C
L70 > 50.000 h Ta 40°C

A++

IP 65


IK 08

I

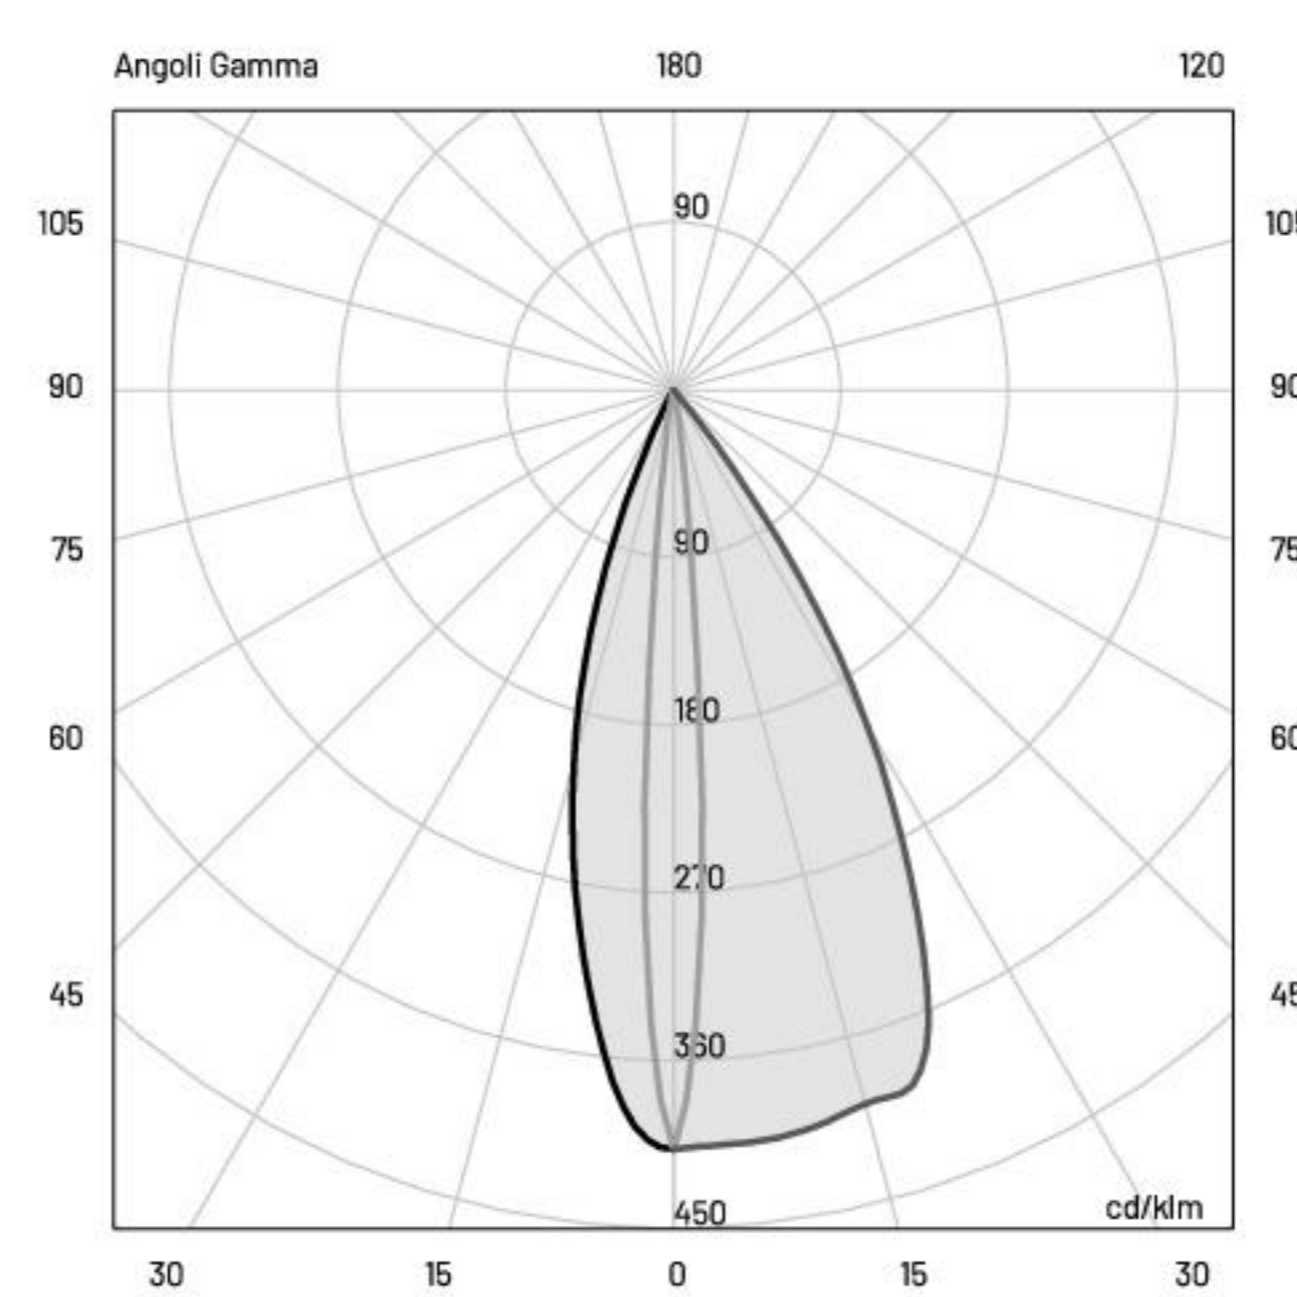

E (LUX)

H (m)	lux (3000 K)	Ø (m)
1.00	106	0.15
2.00	26	0.3
3.00	12	0.45
4.00	7	0.6
5.00	4	0.75

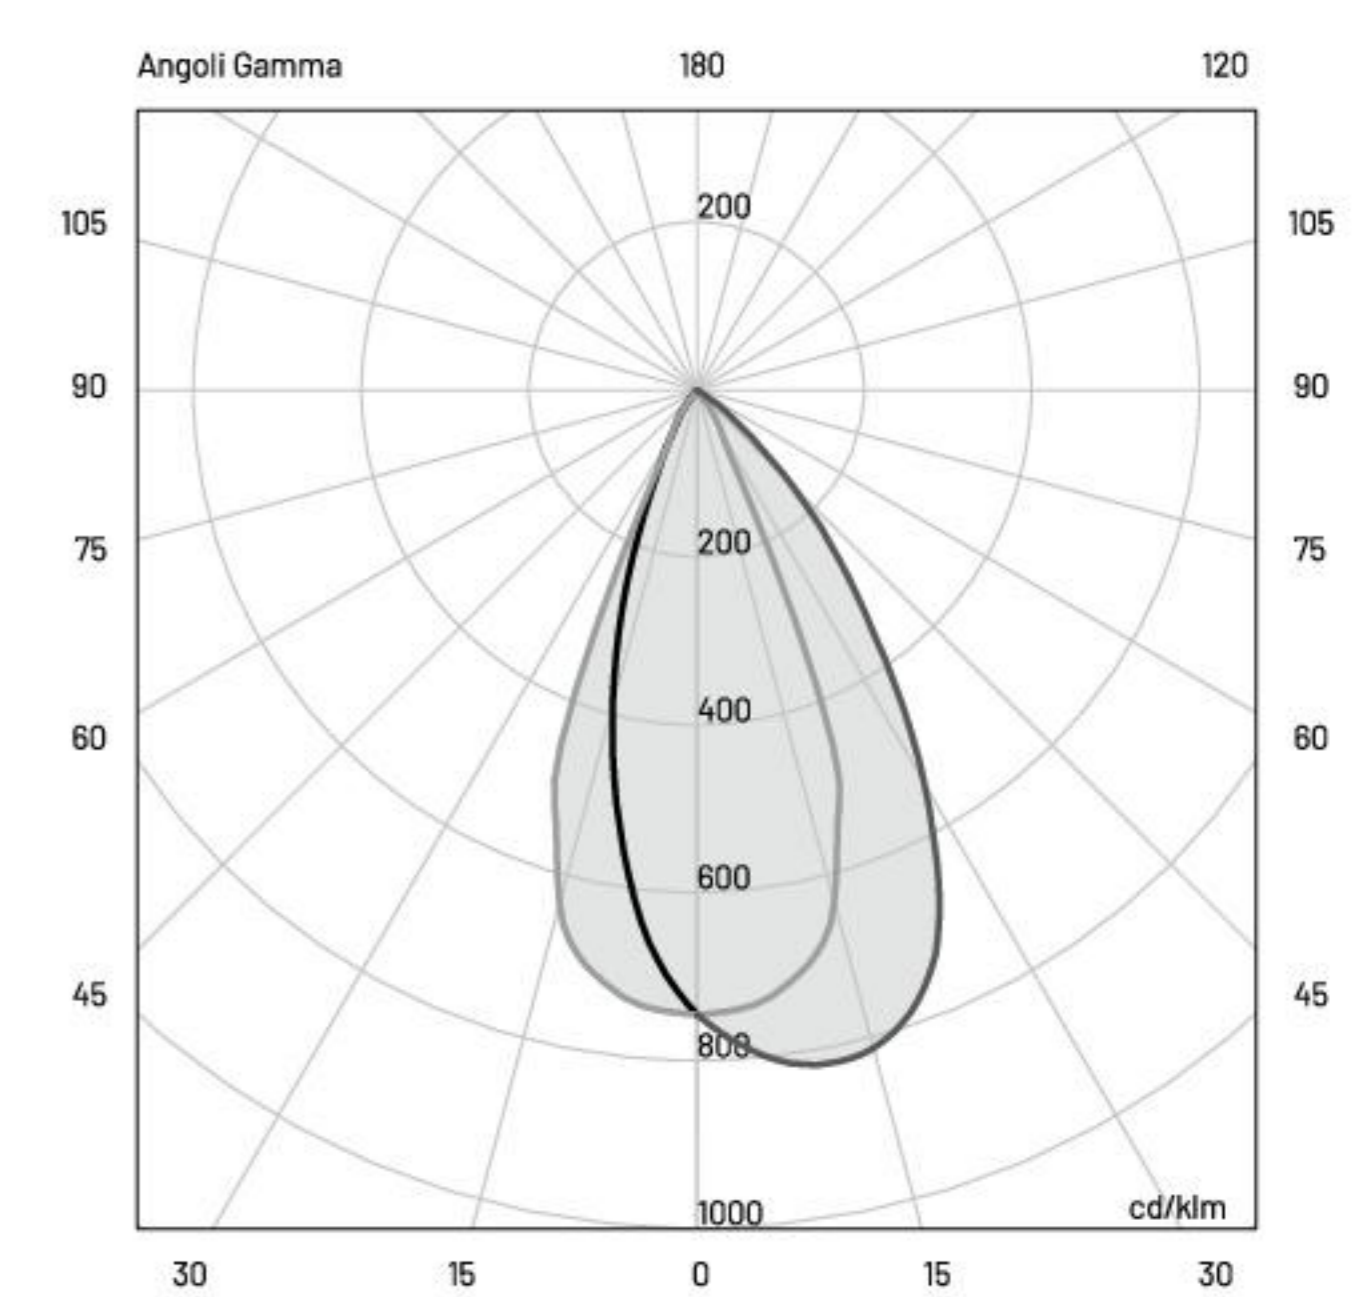

E (LUX)

H (m)	lux (3000 K)	Ø (m)
1.00	205	0.8
2.00	51	1.6
3.00	23	2.4
4.00	13	3.2
5.00	8	4