


lyras 130 | 20W

DOUBLE SPOT • DOUBLE MEDIUM • DOUBLE WIDE FLOOD •
DOUBLE SPOT/WIDE FLOOD




TECHNICAL SPECIFICATIONS

	DOUBLE SPOT	DOUBLE MEDIUM
Source lamp	LED 20 W	LED 20 W
Total wattage	25 W	25 W
Voltage	220-240 Vac, 50-60 Hz	220-240 Vac, 50-60 Hz
Control	On/Off • dimmable on request	On/Off • dimmable on request
Light colour	3000 K • 4000 K • other colours on request	3000 K • 4000 K • other colours on request
Luminous flux *Source flux	2288 lm (2600 lm*) @ 3000 K 2288 lm (2600 lm*) @ 4000 K	2256 lm (2600 lm*) @ 3000 K 2256 lm (2600 lm*) @ 4000 K
Luminous efficacy	91.5 lm/W @ 3000 K 91.5 lm/W @ 4000 K	90 lm/W @ 3000 K 90 lm/W @ 4000 K
McADAM steps	3	3
Beam	18° / 18°	33° / 33°
CRI	> 90	> 90
Life time	L70 > 50.000 h Ta 25°C L70 > 50.000 h Ta 40°C	L70 > 50.000 h Ta 25°C L70 > 50.000 h Ta 40°C
Energy efficiency class	A++	A++
IP rating	IP 66	IP 66
IK rating	IK 08	IK 08
Insulation class	I	I

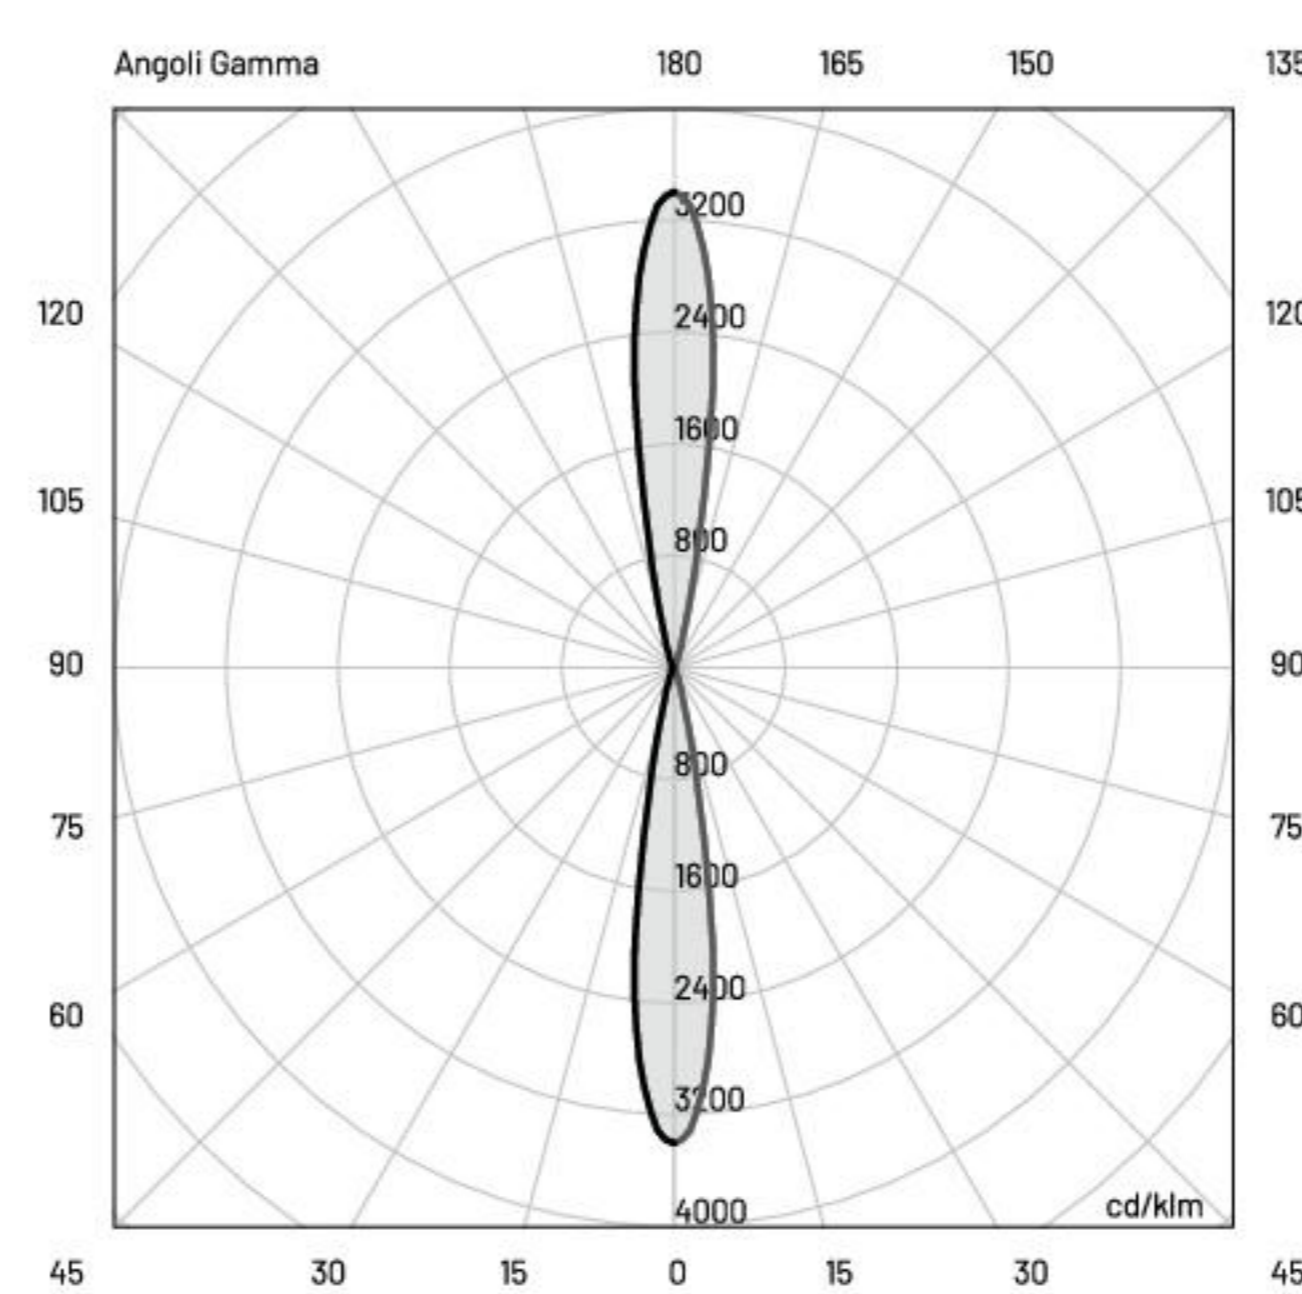

E (LUX)			
H (m)	lux (3000 K)	lux (4000 K)	Ø (m)
1.00	2 x 8850	2 x 8850	0.3
2.00	2 x 2212	2 x 2212	0.6
3.00	2 x 983	2 x 983	0.9
4.00	2 x 553	2 x 553	1.2
5.00	2 x 354	2 x 354	1.6

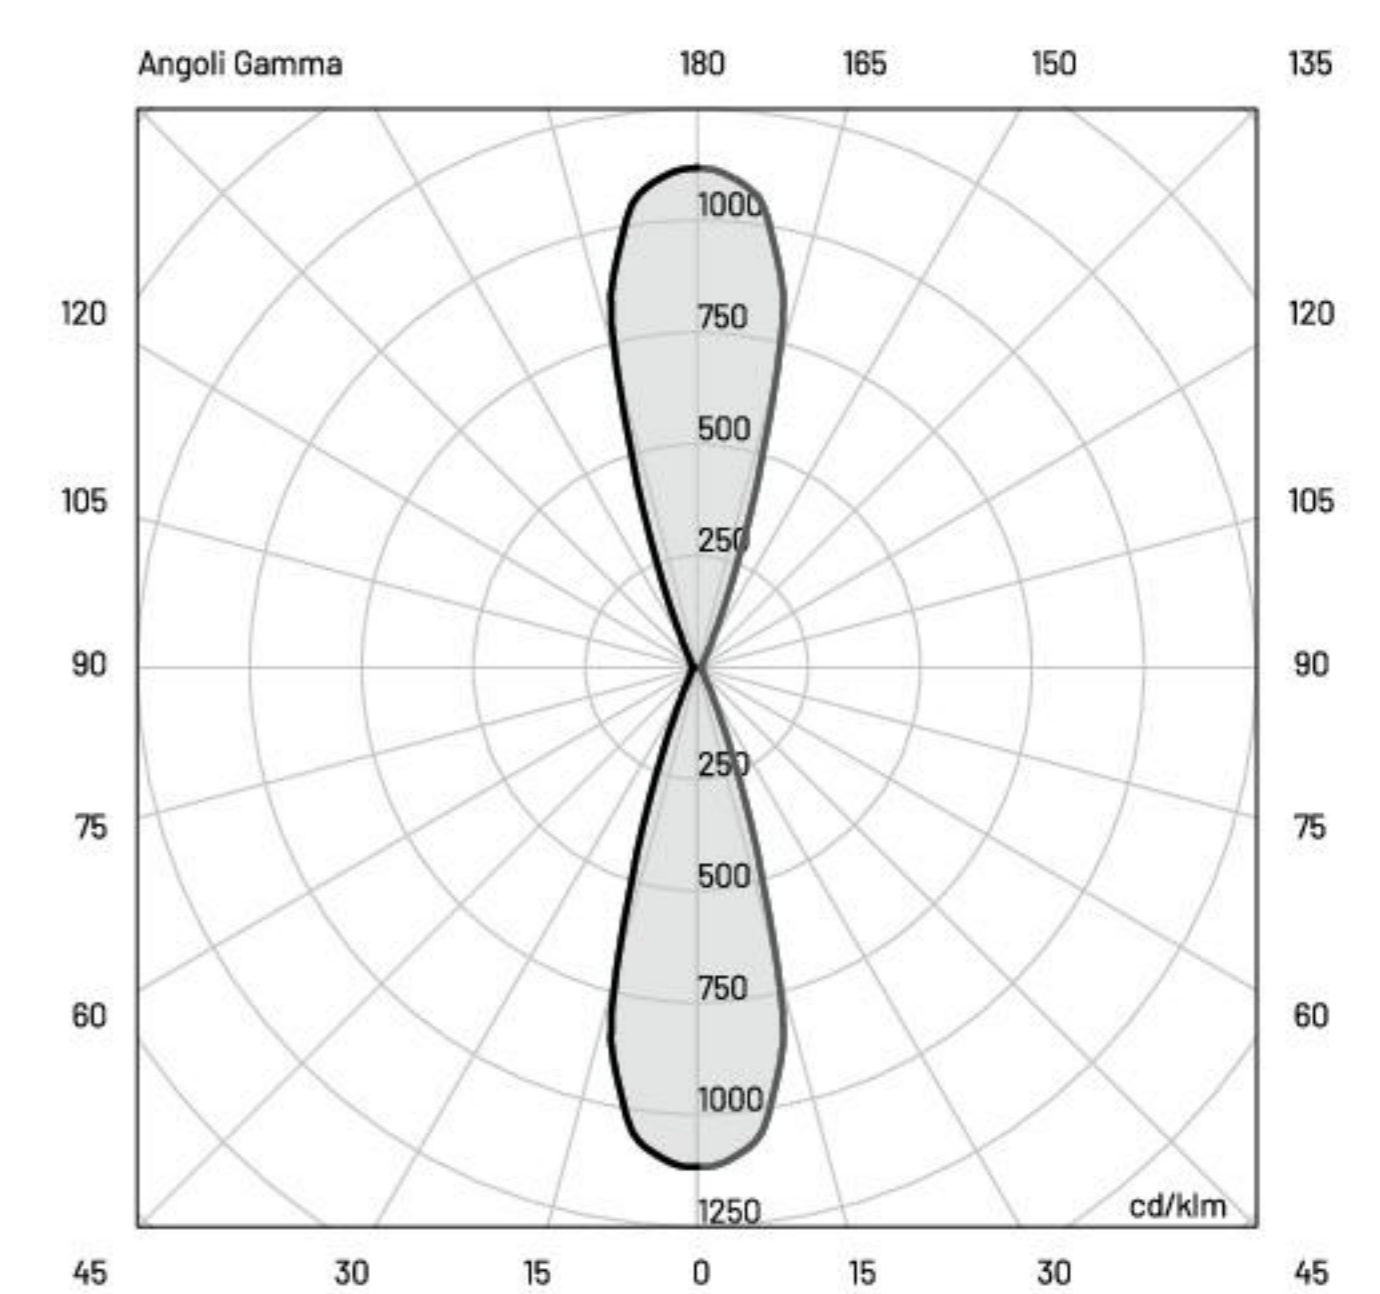

E (LUX)			
H (m)	lux (3000 K)	lux (4000 K)	Ø (m)
1.00	2 x 2905	2 x 2905	0.6
2.00	2 x 726	2 x 726	1.1
3.00	2 x 323	2 x 323	1.8
4.00	2 x 182	2 x 182	2.4
5.00	2 x 116	2 x 116	3