




## MATERIALS

|           |                                 |
|-----------|---------------------------------|
| Body      | Extruded aluminium EN AW6060    |
| Diffuser  | Extra clear tempered glass 8 mm |
| Finishing | Anodized                        |

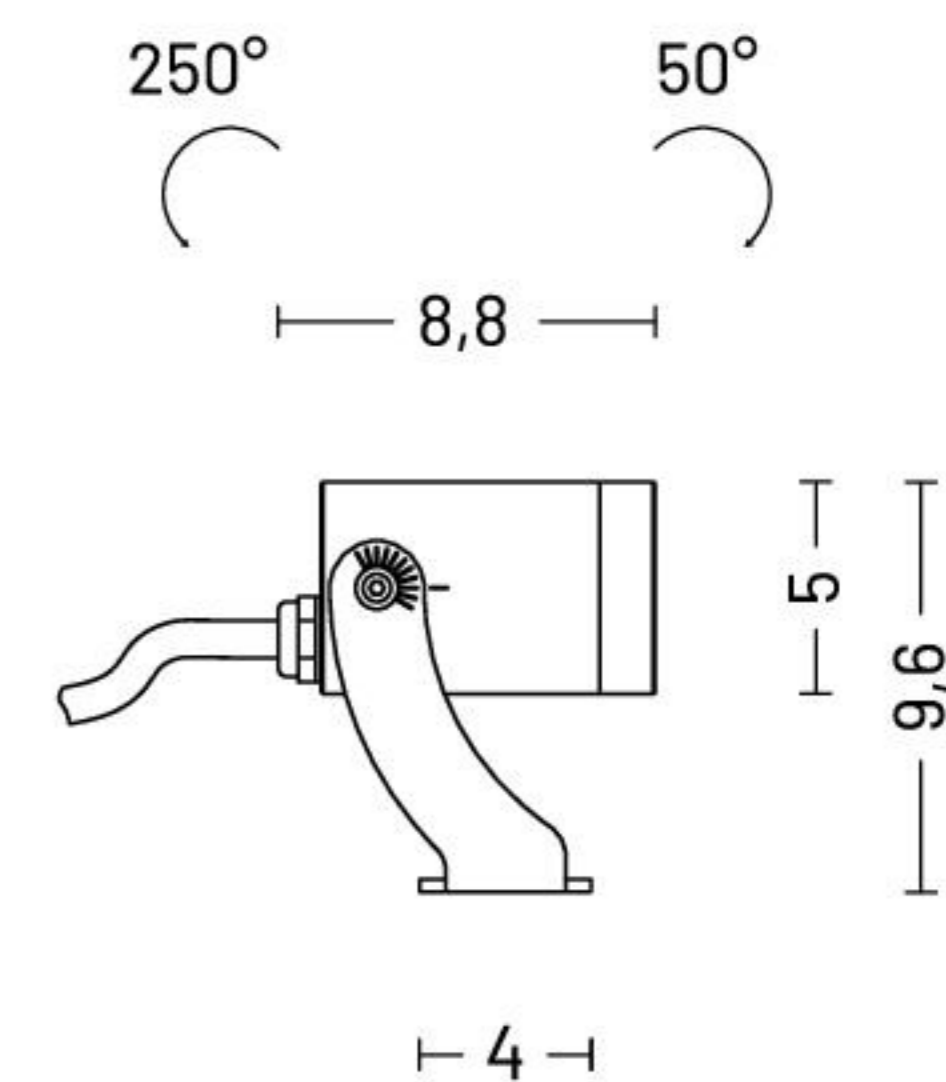

## ORDER CODE

|                        |              |                               |  |
|------------------------|--------------|-------------------------------|--|
| LY 3 0 PRO _ _ B 7 Z _ |              |                               |  |
|                        | Finishing    | 1                             | Inox    |
|                        |              | 2                             | Bronze  |
|                        | Light colour | N                             | 4000 K   |
|                        |              | H                             | 3000 K   |
|                        | Beam         | S                             | Spot   |
|                        |              | F                             | Flood  |
|                        |              | D                             | Diffuse  |
|                        | Example      | LY 3 0 PRO <b>S</b> N B 7 Z 1 |  |

## INCLUDED ACCESSORIES

| Code | Description              | Page |
|------|--------------------------|------|
| -    | 1 m length cable -05RN-F | -    |

## AVAILABLE ACCESSORIES

| Code      | Description                  | Page |
|-----------|------------------------------|------|
| 00A469    | Mounting spike               | 478  |
| 0404M009  | Single connection IP68       | 478  |
| 0409BT014 | Transformer _ 24 Vdc - 12 W  | 478  |
| 0409BT015 | Transformer _ 24 Vdc - 25 W  | 478  |
| 0409BT016 | Transformer _ 24 Vdc - 100 W | 478  |

