


## MATERIALS

|           |                                 |
|-----------|---------------------------------|
| Body      | Die-cast aluminium EN47100      |
| Diffuser  | Extra clear tempered glass 5 mm |
| Finishing | Polyester powder paint          |

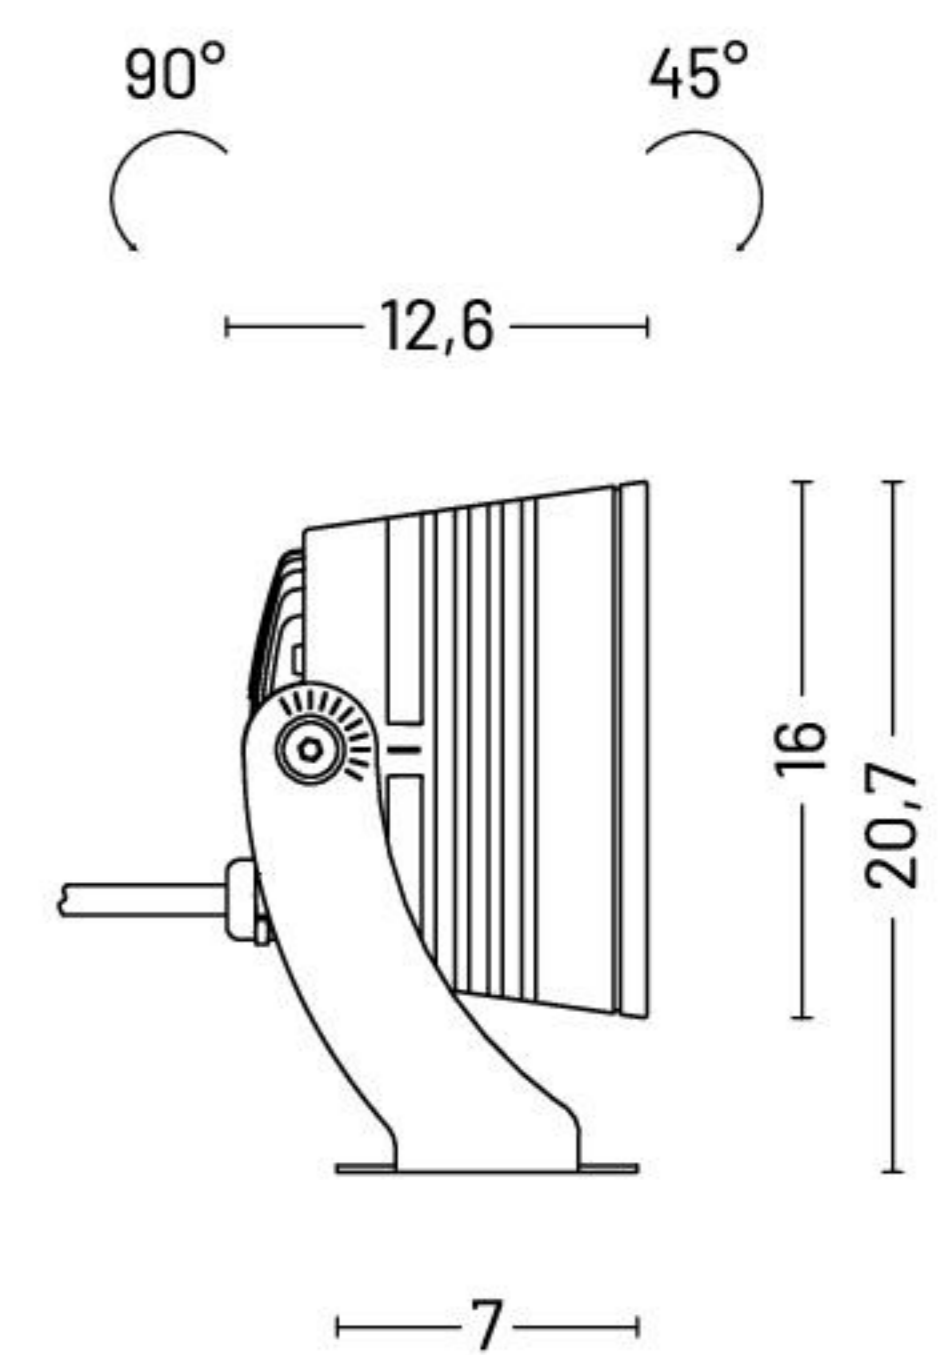

## ORDER CODE

|            |     |              |                       |              |
|------------|-----|--------------|-----------------------|--------------|
| LY 8 0 PRO | --- | B 11         | ---                   |              |
|            |     | Finishing    | L                     | Graphite ●   |
|            |     |              | M                     | Light grey ● |
|            |     | Light colour | N                     | 4000 K       |
|            |     |              | H                     | 3000 K       |
|            |     | Beam         | S                     | Spot         |
|            |     |              | F                     | Flood        |
|            |     |              | W                     | Wide flood   |
|            |     | Example      | LY 8 0 PRO S N B 11 L |              |

## INCLUDED ACCESSORIES

| Code | Description              | Page |
|------|--------------------------|------|
| -    | 2 m length cable H07RN-F | -    |

## AVAILABLE ACCESSORIES

| Code       | Description            | Page |
|------------|------------------------|------|
| 00A4641.01 | Joint for pole Ø 60 mm | 479  |
| 00A4641.02 | Tree rope              | 479  |
| 00A4641.03 | Mounting spike         | 479  |
| 0404M003   | Loop-in loop-out IP68  | 479  |
| 0404M004   | Single connection IP68 | 479  |

