




HALOS B

La famiglia di anelli decorativi Halos si arricchisce con questa versione a luce diretta-indiretta. Un dettaglio inconfondibile e d'impatto, ideale per decorare spazi residenziali e ambienti professionali.

The family of decorative rings Halos is enriched with this version direct-indirect light. An unmistakable and striking detail, ideal for decorating residential spaces and professional environments.



HALOS B

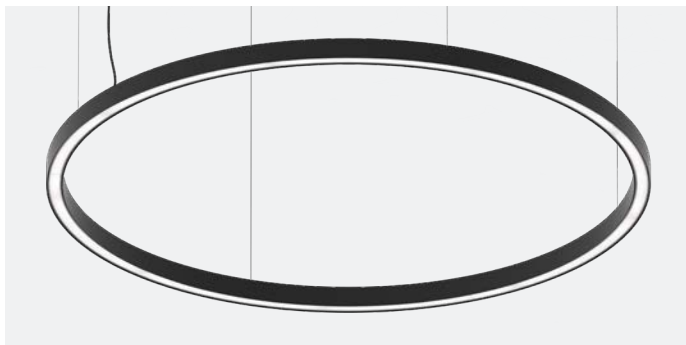


Profilo LED circolare per installazione a sospensione ad emissione di luce diretta-indiretta, con doppia accensione.

Corpo in estruso di alluminio e rosone in acciaio verniciati a polvere, schermi diffusori in PMMA opale. Disponibili rosone con alimentazione integrata per cavi di sospensione convergenti o paralleli, oppure rosone per alimentazione remota. Alimentazione elettronica 220-240V 50/60Hz disponibile anche DALI/PUSH.

Circular LED profile for suspension installation with direct-indirect light output, with double switch.

Extruded aluminum body and powder-coated steel canopy, opal PMMA diffuser screens. Canopies with integrated driver are available for converging or parallel suspension cables, or rosettes for remote power supply. Electronic power supply 220-240V 50/60hz also available DALI/PUSH.





HALOS B 962

n°4 cavi di sospensione
L=3000 mm e cavo di
alimentazione (4x0,5 mmq)
con guaina in tinta, inclusi.
Rosone per alimentazione remota
o integrata da ordinare a parte.

n°4 suspension cables
L=3000 mm and power cable
(4x0,5 mmq) with matching
sheath, included.
Canopy for remote or integrated
power supply to be ordered
separately.

Ø (mm)	POWER	FLUX	3000K	4000K
962	92W	7384 lm	<input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/>
			107101.01	107102.01
			.02	.02




HALOS B 1440

n°4 cavi di sospensione
L=3000 mm e cavo di
alimentazione (4x0,5 mmq)
con guaina in tinta, inclusi.
Rosone per alimentazione remota
o integrata da ordinare a parte.

n°4 suspension cables
L=3000 mm and power cable
(4x0,5 mmq) with matching
sheath, included.
Canopy for remote or integrated
power supply to be ordered
separately.

Ø (mm)	POWER	FLUX	3000K	4000K
1440	138W	11037 lm	<input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/>
			107103.01	107104.01
			.02	.02



HALOS B

ACCESSORI PER INSTALLAZIONE CON ALIMENTAZIONE REMOTA
ACCESSORIES FOR REMOTE DRIVER MOUNTING

ROSONE PER INSTALLAZIONE SINGOLA
n°1 kit di alimentazione da ordinare a parte.

CANOPY FOR SINGLE INSTALLATION
n°1 power supply kit to be ordered separately.

CODE

107113.01 .02



ROSONE PER INSTALLAZIONE DOPPIA
n°2 kit di alimentazione da ordinare a parte.

CANOPY FOR DOUBLE INSTALLATION
n°2 power supply kits to be ordered separately.


CODE

107114.01 .02



KIT DI ALIMENTAZIONE
composto da n°2 alimentatori elettronici
220-240V 50/60 Hz,
per luce diretta e indiretta.

POWER SUPPLY KIT
composed of n°2 electronic drivers
220-240V 50/60 Hz,
for direct and indirect light.

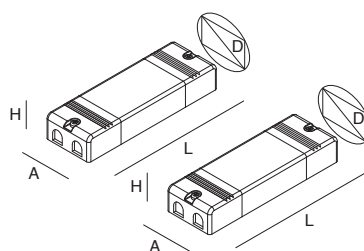

CODE VERSION D (mm) A (mm) H (mm) L (mm)

107105.99 962 mm 91 85 31 220

107109.99 1440 mm 105 100 31 235

DALI-PUSH

CODE VERSION D (mm) A (mm) H (mm) L (mm)

107106.99 962 mm 91 85 31 220

107110.99 1440 mm 105 100 31 235

HALOS B

ACCESSORI PER INSTALLAZIONE CON ALIMENTAZIONE INTEGRATA
ACCESSORIES FOR INTEGRATED DRIVER MOUNTING

ROSONE ALIMENTATO
PER CAVI CONVERGENTI
composto da n°2 alimentatori elettronici
220-240V 50/60 Hz,
per luce diretta e indiretta.
Idoneo per sola installazione singola.
Prevista accensione unica per gestione PUSH.

FEED CANOPY
FOR CONVERGING CABLES
composed of n°2 electronic drivers
220-240V 50/60 Hz,
for direct and indirect light.
Suitable for single installation only.
Single switch for PUSH management.

CODE VERSION

107107.01 .02 962 mm


107111.01 .02 1440 mm

DALI-PUSH

CODE VERSION

107108.01 .02 962 mm

107112.01 .02 1440 mm



ROSONE ALIMENTATO
PER CAVI PARALLELI
composto da n°2 alimentatori elettronici
220-240V 50/60 Hz,
per luce diretta e indiretta.
Idoneo per sola installazione singola.
Prevista accensione unica per gestione PUSH.

FEED CANOPY
FOR PARALLEL CABLES
composed of n°2 electronic drivers
220-240V 50/60 Hz,
for direct and indirect light.
Suitable for single installation only.
Single switch for PUSH management.

CODE VERSION

107115.01 .02 962 mm

107117.01 .02 1440 mm

DALI-PUSH

CODE VERSION

107116.01 .02 962 mm

107118.01 .02 1440 mm