

Flea

DOWNLIGHT
White led

IP67

IK10



Collection name

FLEA round

FLEA square

Technical data

Power (Real data)
Lumen 3000K (Real data)
Lumen 4000K (Real data)
Class
Nominal Voltage
Power supply

4.5 W
475 lm (Optic .01)
510 lm (Optic .01)
III
24V DC dimmable
See bottom page

4.5 W
475 lm (Optic .01)
510 lm (Optic .01)
III
24V DC dimmable
See bottom page

Configuration code

Select finish / led / optic

20128 + X + Y + Z

20129 + X + Y + Z

Finish X

- 2 - White (RAL 9010)
- 5 - Anodized aluminium
- 6 - Inox Aisi 316L

- 2 - White (RAL 9010)
- 5 - Anodized aluminium
- 6 - Inox Aisi 316L

Color LED Y

- .2 - 2700K CRI > 80
- .3 - 3000K CRI > 80
- .4 - 4000K CRI > 80



- .2 - 2700K CRI > 80
- .3 - 3000K CRI > 80
- .4 - 4000K CRI > 80

Optic Z

- .01 - 10° Spot
- .02 - 30° Medium
- .04 - 14°x20° Elliptical
- .05 - Diffused

- .01 - 10° Spot
- .02 - 30° Medium
- .04 - 14°x20° Elliptical
- .05 - Diffused

Technical drawing

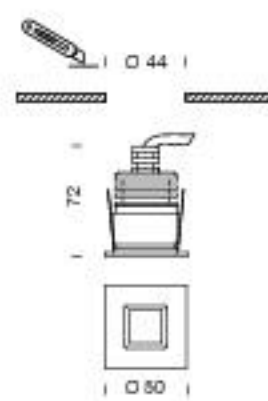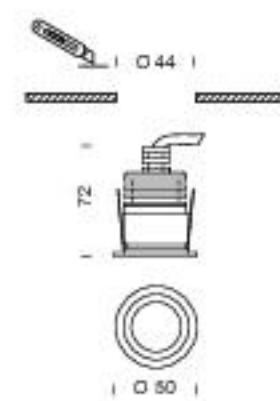

Accessories

Schema collegamenti
Installation scheme
Schéma d'installation

pag. 300

MONOCHROMATIC LED POWER SUPPLIES

MASTER (24V in - 24V out)

0-10V / 1-10V / PUSH			
C219	192W max.	44x57x19 mm	IP20
DALI			
C224	156W max.	44x57x25 mm	IP10
BLUETOOTH			
C225	156W max.	44x57x25 mm	IP20

DRIVER (220/240V in - 24V out)

D000	20W max.	118x35x26 mm	IP67
D001	40W max.	150x53x35 mm	IP67
D002	60W max.	163x43x32 mm	IP67
D003	120W max.	191x63x38 mm	IP67
D010	185W max.	228x68x39 mm	IP67